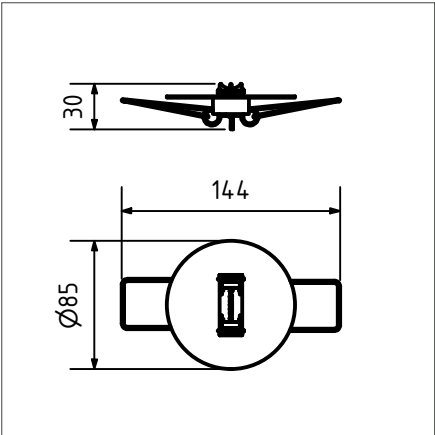
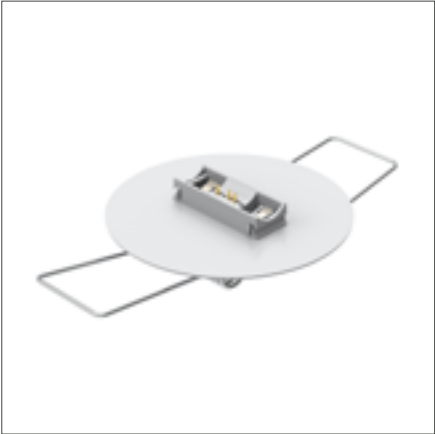


Lumami® DOWNLIGHT

constant current



Produktbeschreibung

Der lineare Einbaustrahler mit der magnetischen Lampenfassung MS5. Zur Verwendung der LTwo® MAG in Konstantstrom von 360 bis 6.400 Lumen und 12 verschiedenen Optiken (von Narrowspot, über Wide Flood (UGR<19) bis Wallwasher). Für ein Montageloch von 50 bis 70 mm Durchmesser. Andere Abmessungen auf Anfrage. Verfügbar in Weiß und Schwarz, in rund und eckig.

Product description

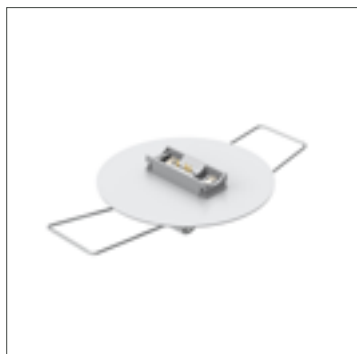
The linear recessed spotlight with the MS5 magnetic socket. For using the LTwo® MAG in constant current from 360 to 6,400 lumens and 12 different optics (from narrow spot to wide flood (UGR<19) and wallwasher). For mounting holes from 50 to 70 mm diameter. Other dimensions on request. Available in white and black, round and square.

Produkteigenschaften / Product features



Product	OP	Color	Weight	L x W x H	Art. No.
Lumami DOWNLIGHT for constant current in 85mm round and white	CC	white	70 g	144 x 58 x 30 mm	13427
Lumami DOWNLIGHT for constant current in 85mm round and black	CC	black	70 g	144 x 58 x 30 mm	13428
Lumami DOWNLIGHT for constant current in 85mm square and white	CC	white	80 g	144 x 58 x 30 mm	13429
Lumami DOWNLIGHT for constant current in 85mm square and black	CC	black	80 g	144 x 58 x 30 mm	13430

Konfiguration der Leuchte / Configuration of the luminaire



Lumami®

1x Lumami® DOWNLIGHT for constant current



<https://apl.ag/products/lumami/downlight>

+



LTwo®

1x LTwo® MAG in constant current



<https://apl.ag/products/ltwo/ltwomag>

+



Accessorie

1x Pre-wired power supply unit in constant current



<https://apl.ag/products/accessories/psu>

=

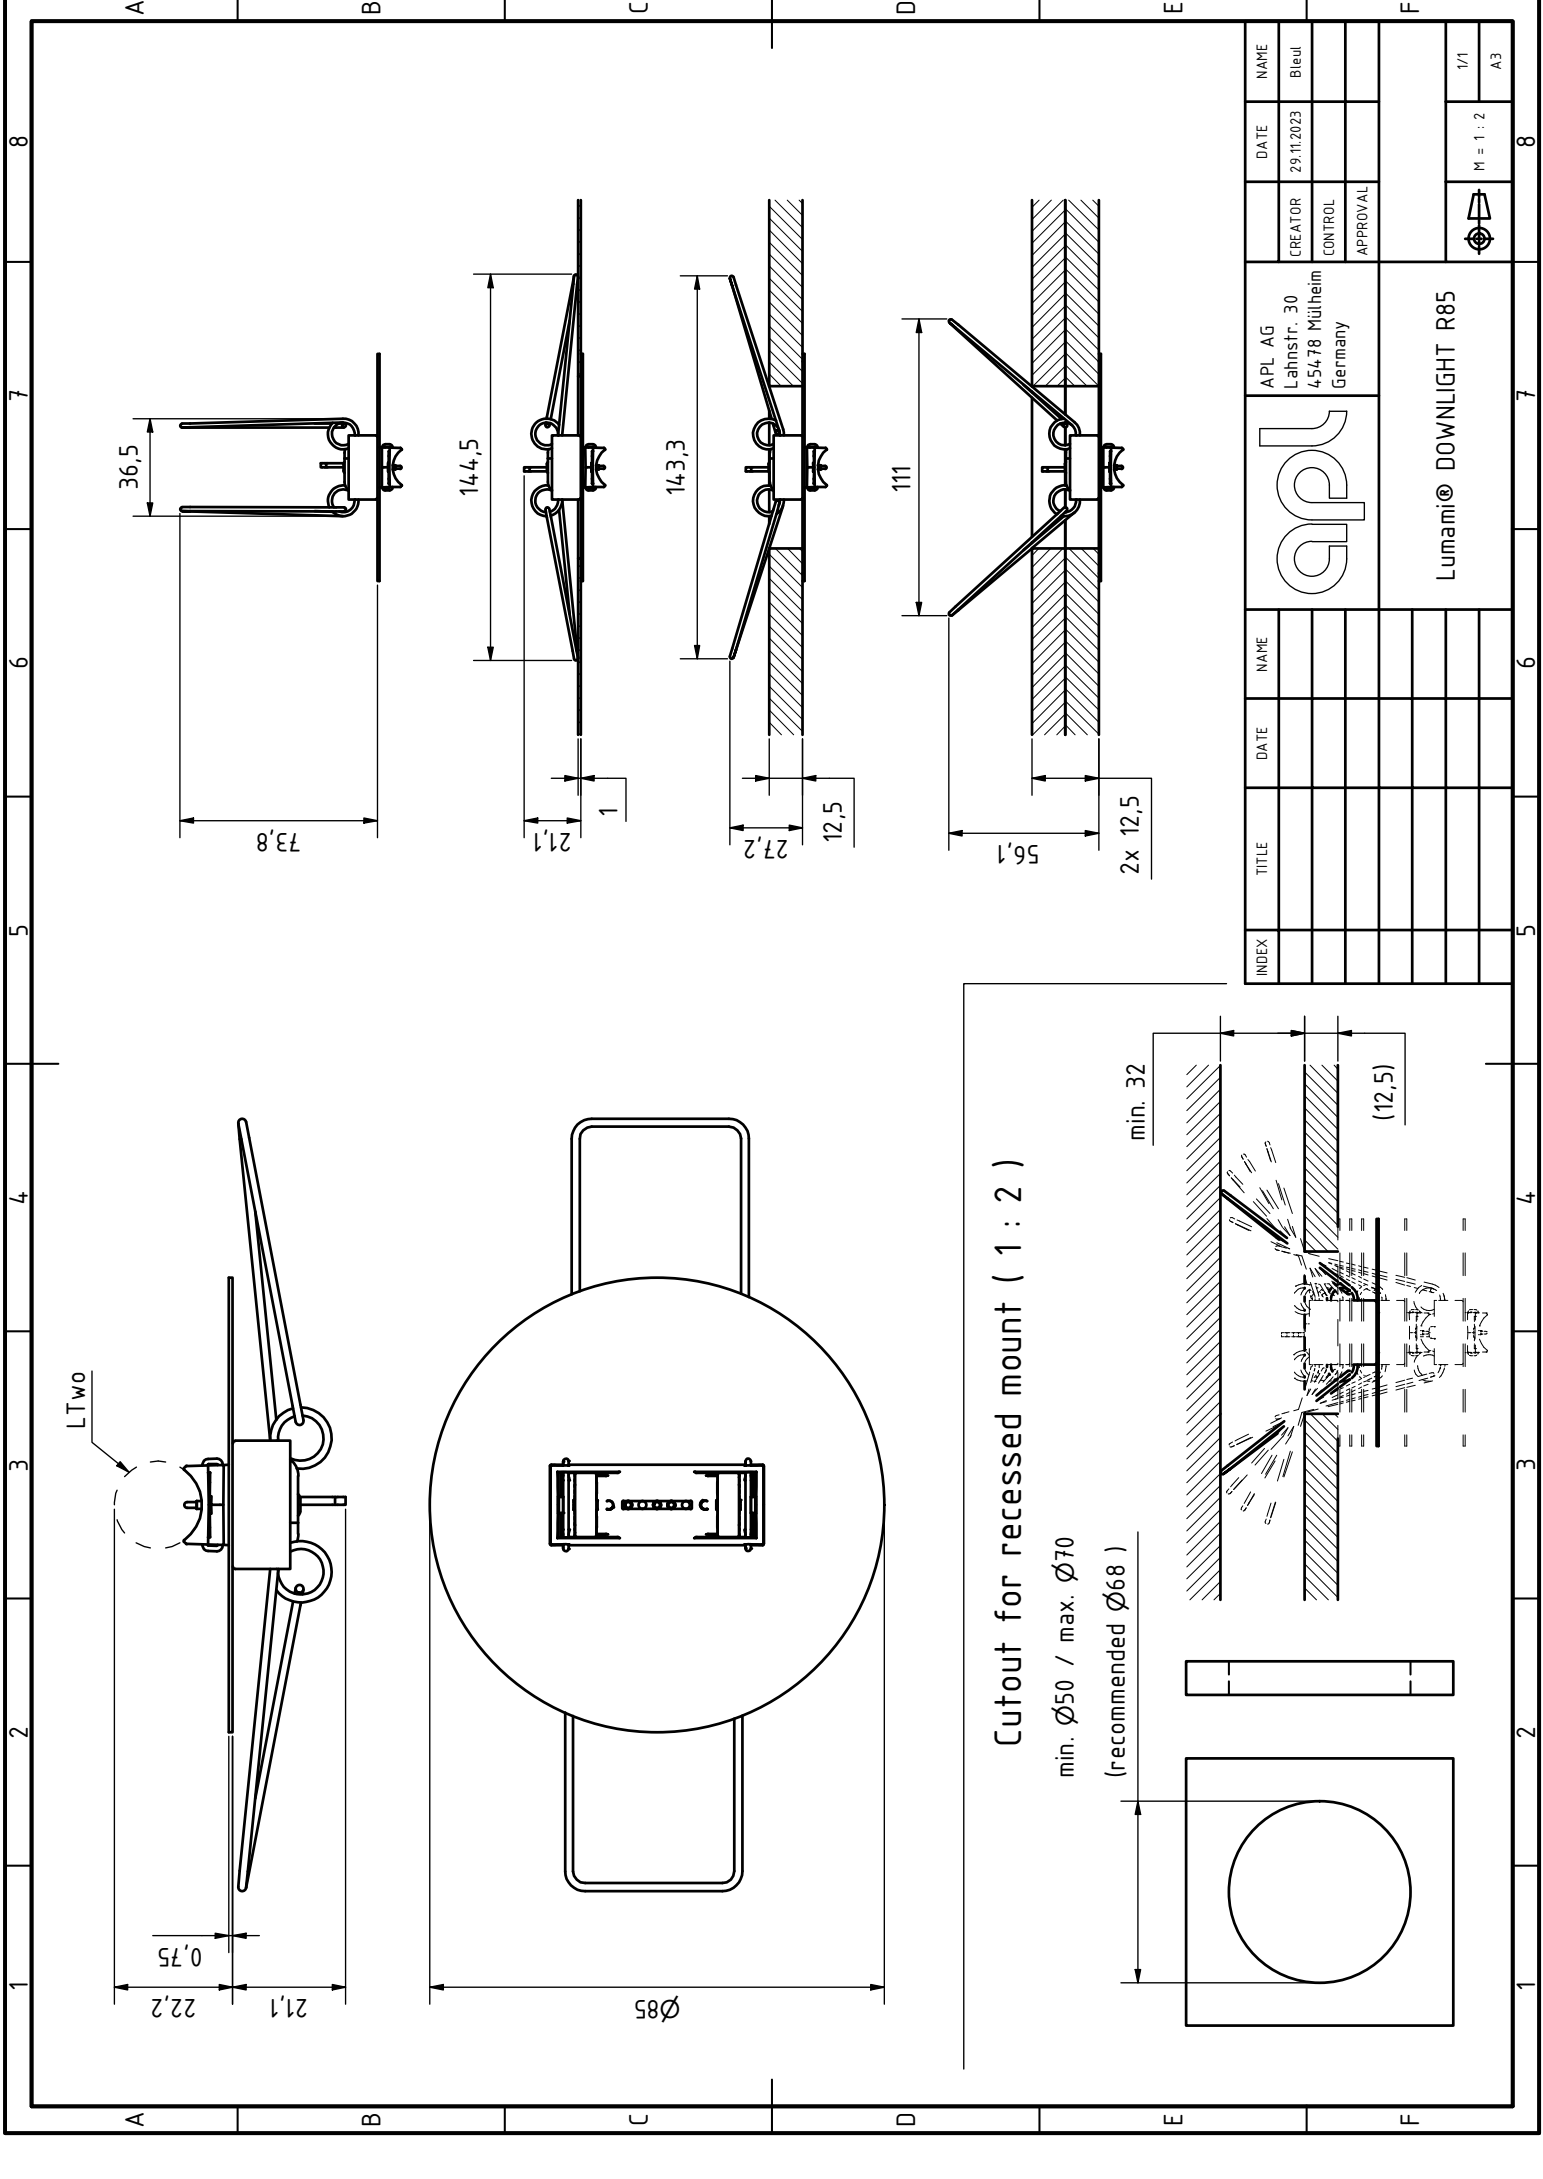
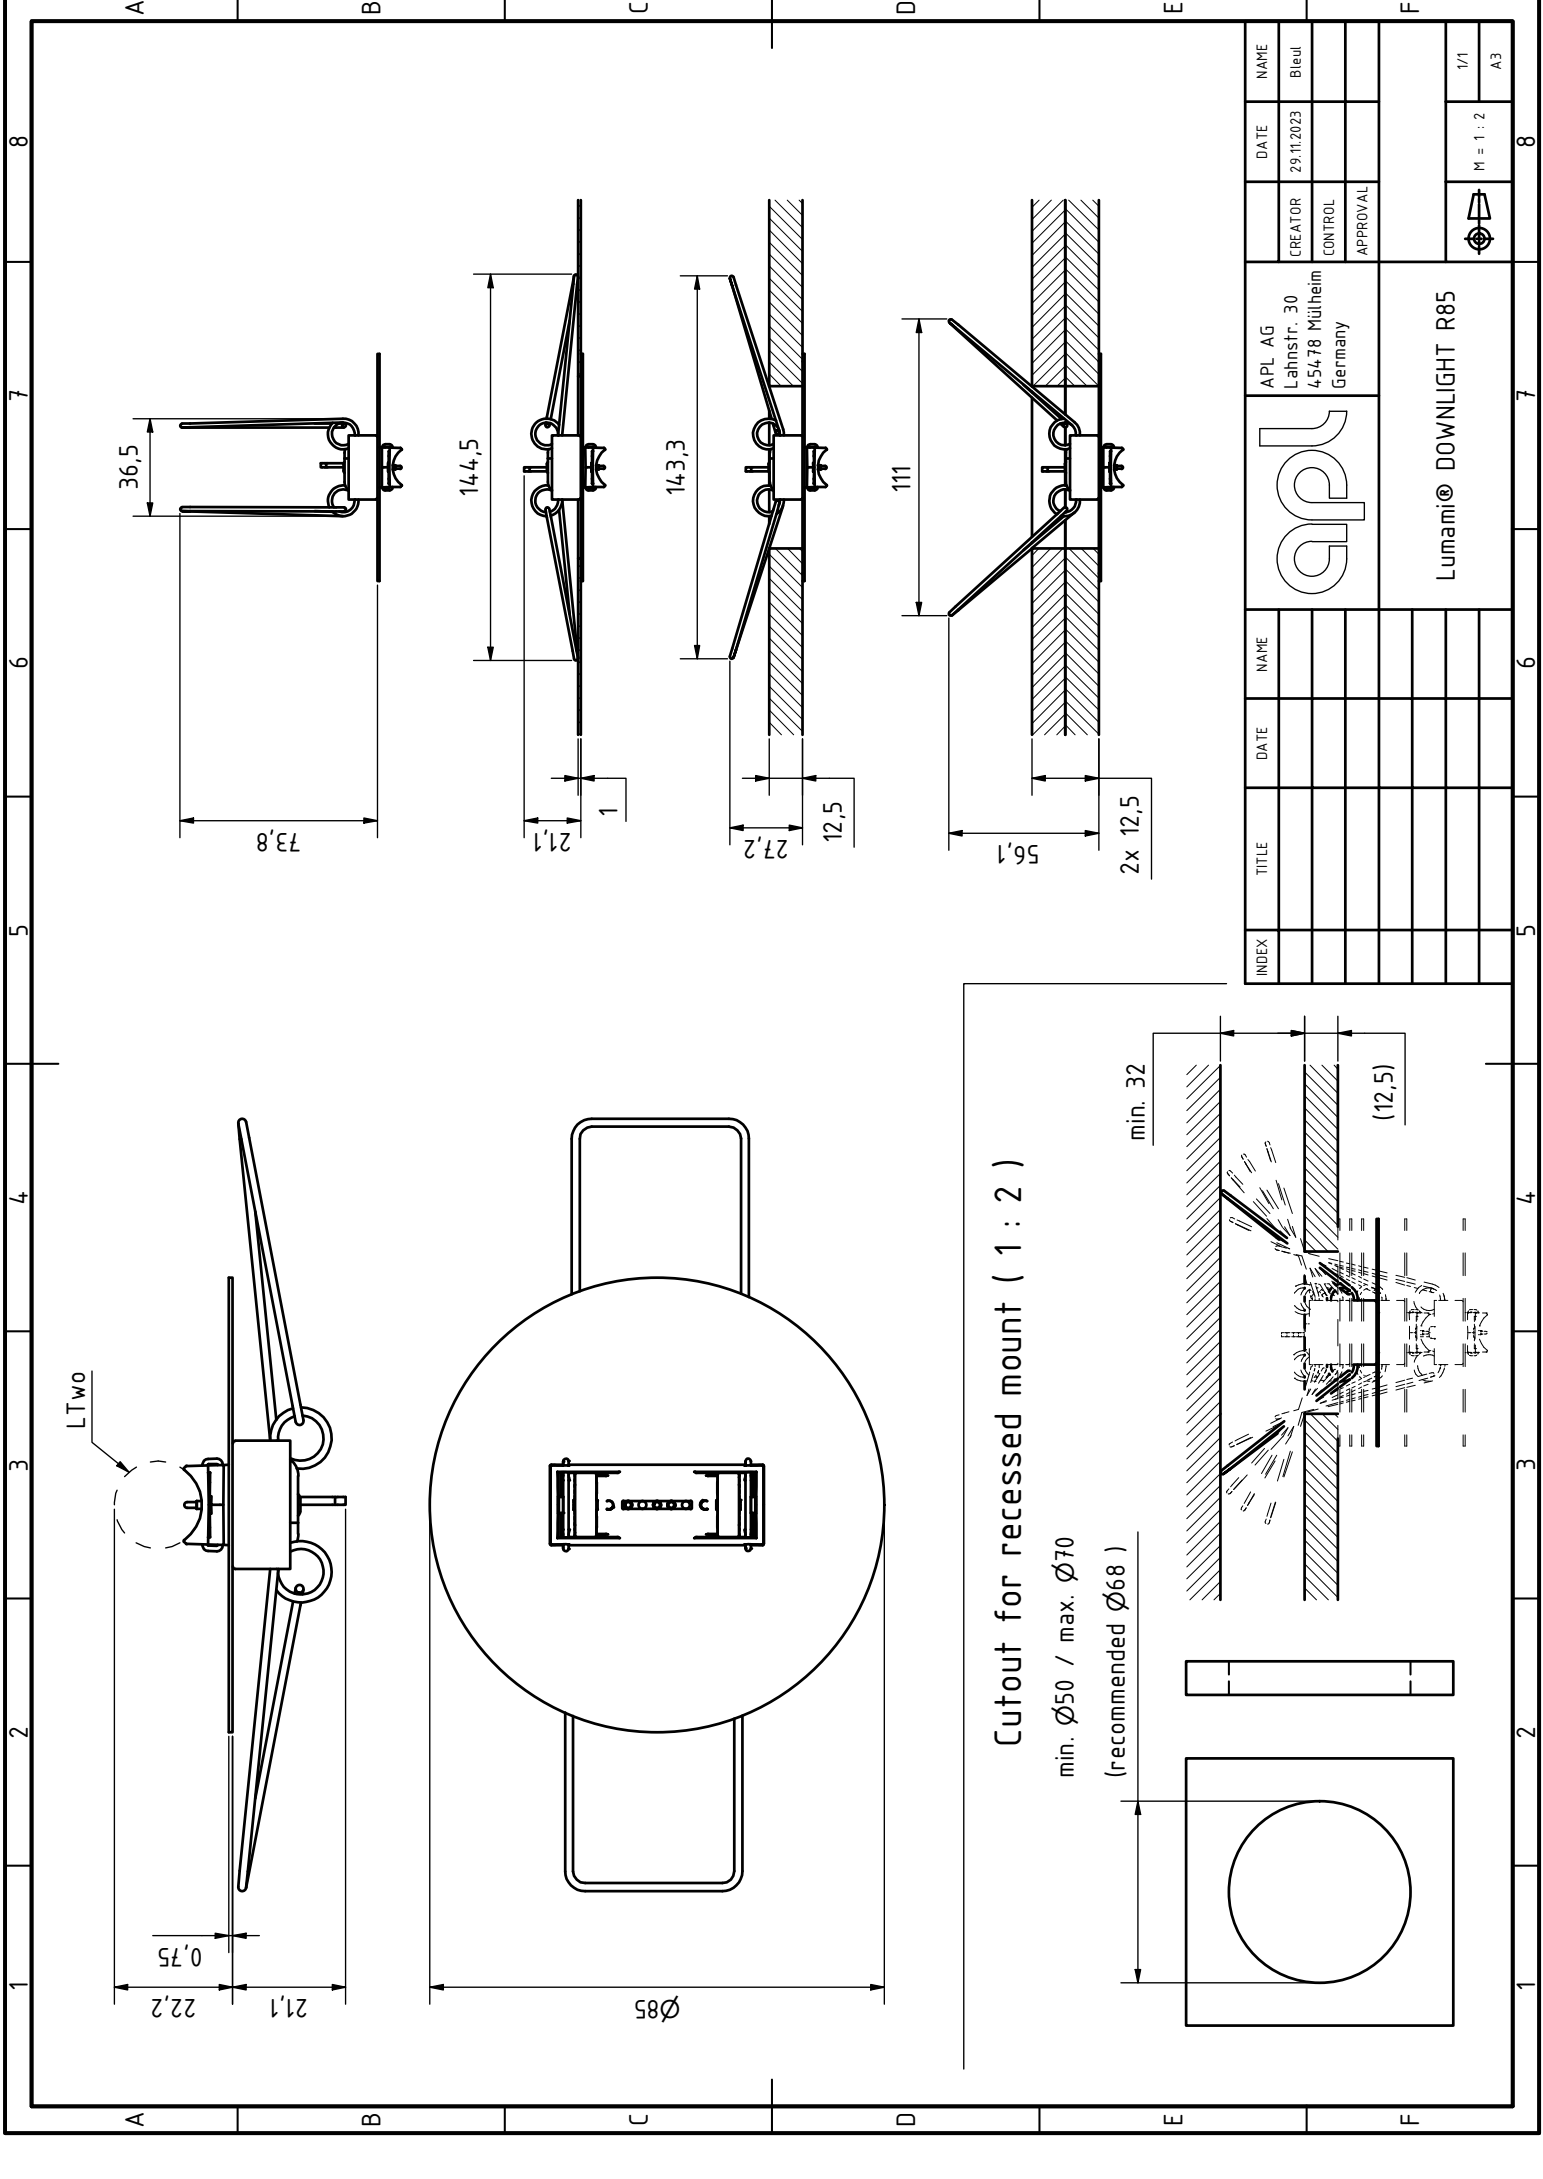


Lumami® + LTwo® + Accessorie

Fertig konfigurierte Leuchte für dein Projekt.

Ready configured luminaire for your project.





Technical drawing of the Lumami® DOWNLIGHT R85, showing various views and dimensions.

Views:

- Top View (A):** Shows the circular light fixture with a diameter of $\varnothing 85$. The mounting arm length is 22,2. The distance from the center to the mounting arm is 21,1. The distance from the center to the mounting arm is 0,75.
- Side View (B):** Shows the light fixture with a height of 36,5. The distance from the center to the mounting arm is 73,8.
- Front View (C):** Shows the light fixture with a height of 144,5. The distance from the center to the mounting arm is 21,1. The distance from the center to the mounting arm is 1.
- Front View (D):** Shows the light fixture with a height of 143,3. The distance from the center to the mounting arm is 27,2. The distance from the center to the mounting arm is 12,5.
- Front View (E):** Shows the light fixture with a height of 111. The distance from the center to the mounting arm is 56,1. The distance from the center to the mounting arm is 2x 12,5.
- Front View (F):** Shows the light fixture with a height of 111. The distance from the center to the mounting arm is 56,1. The distance from the center to the mounting arm is 2x 12,5.

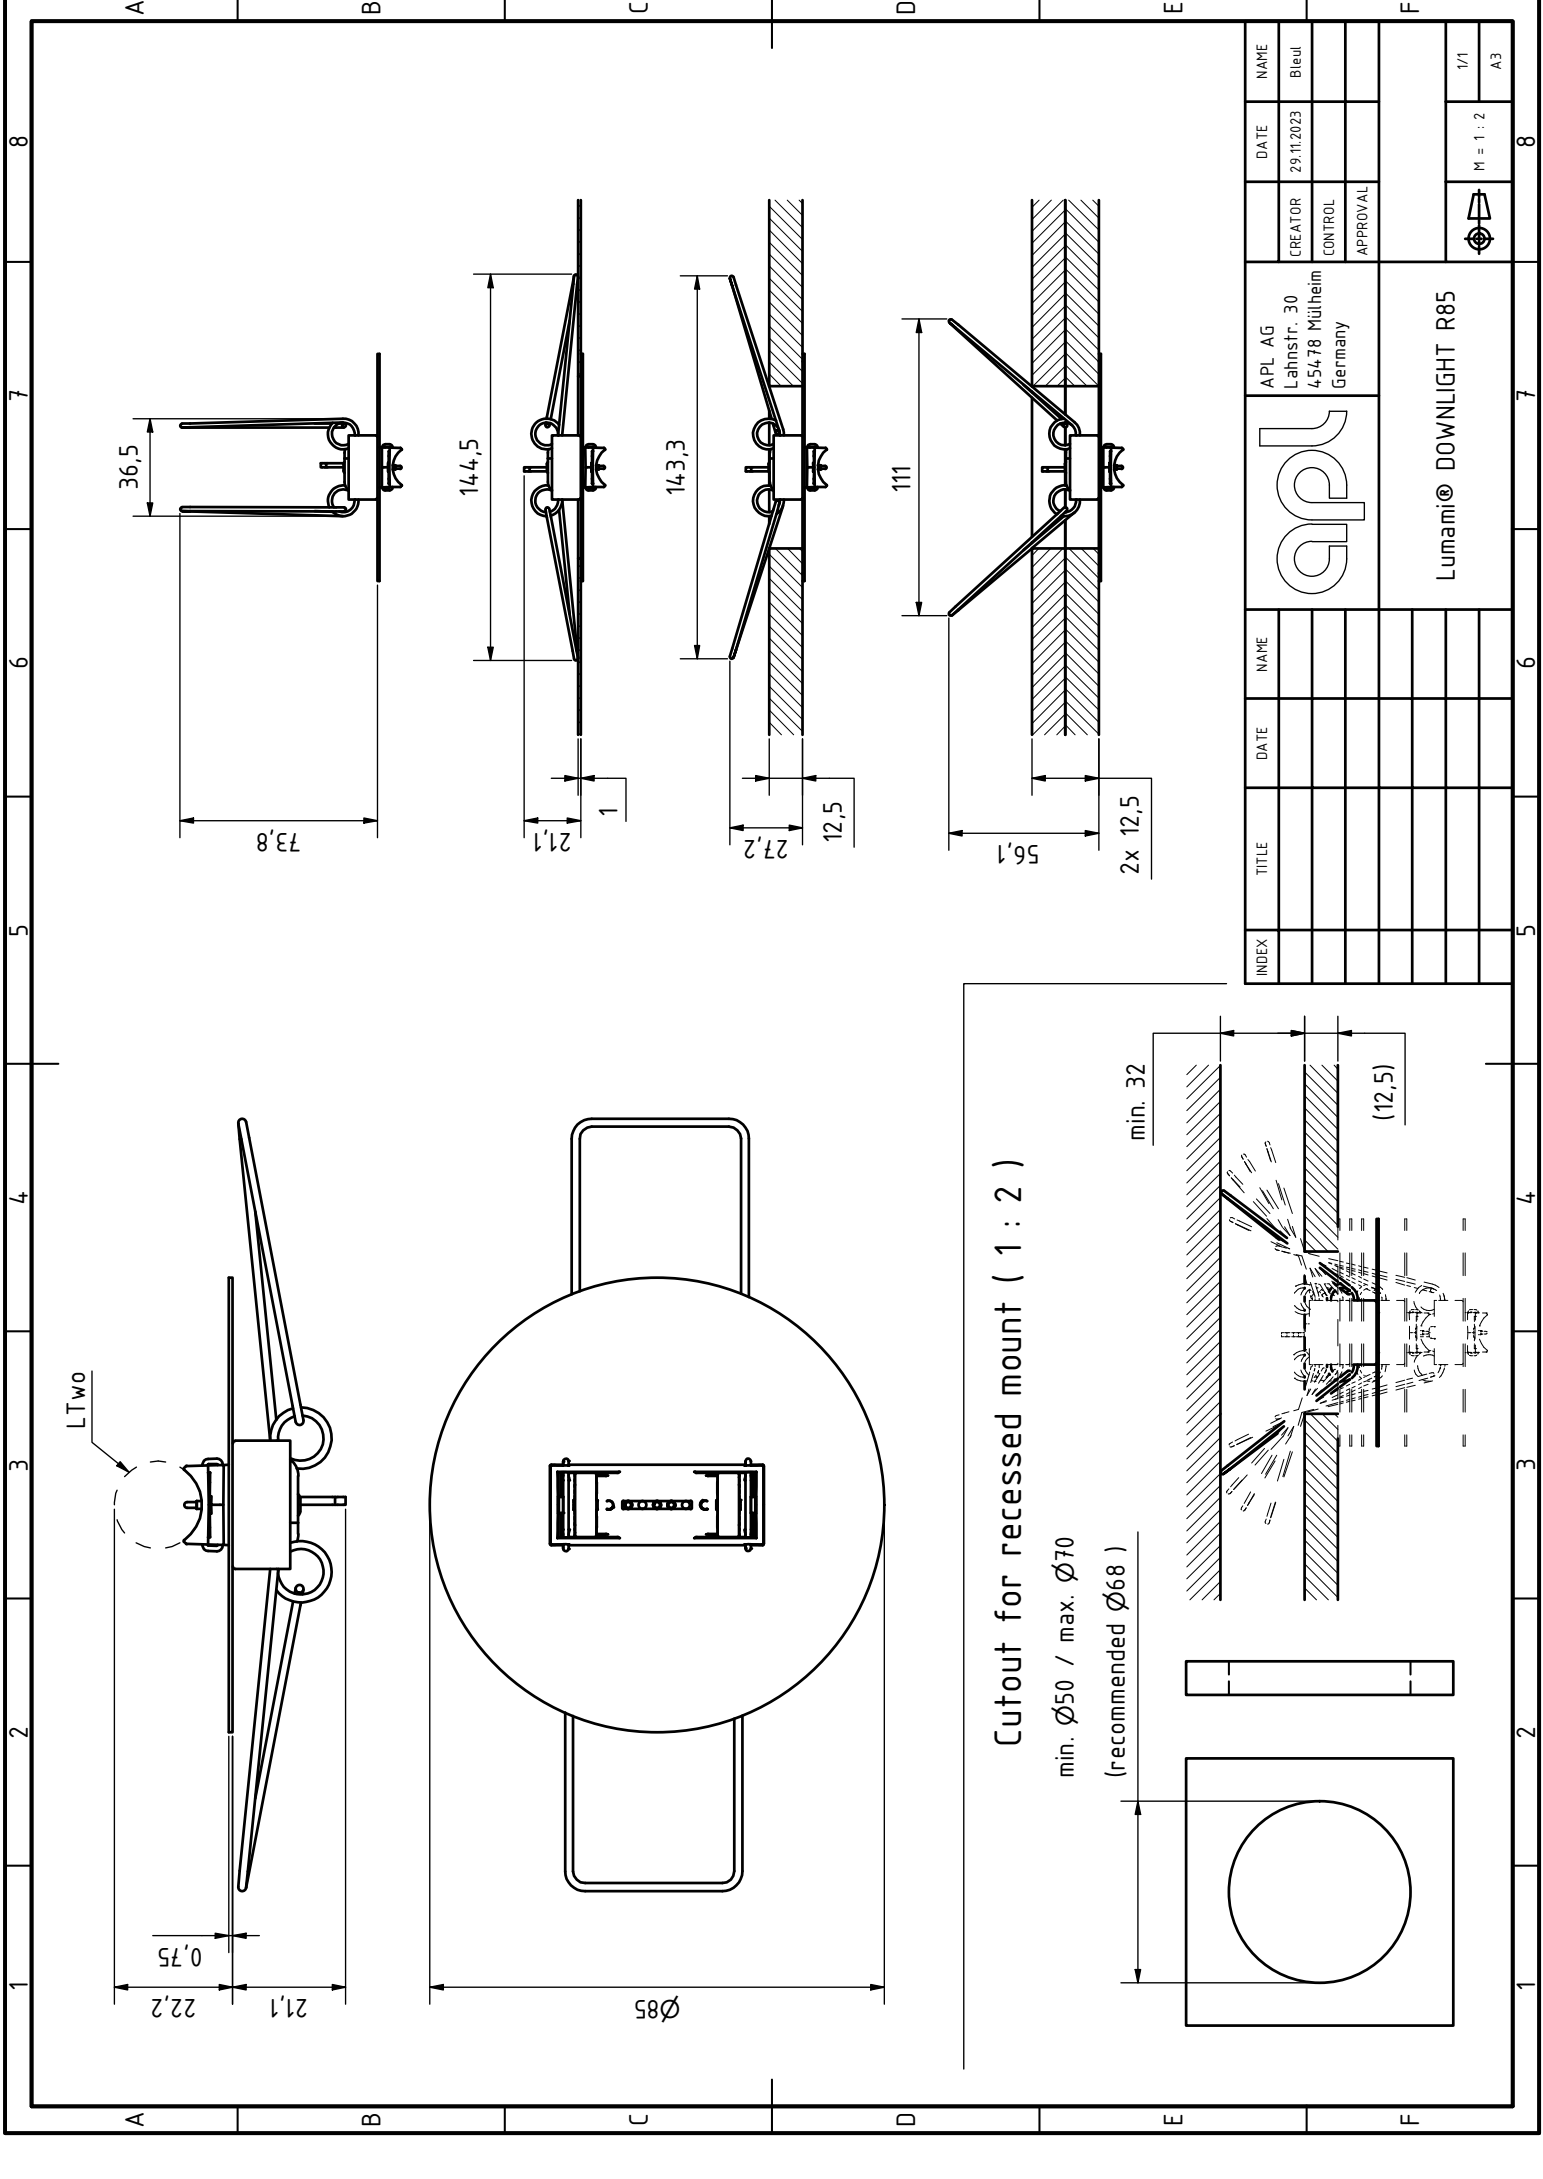
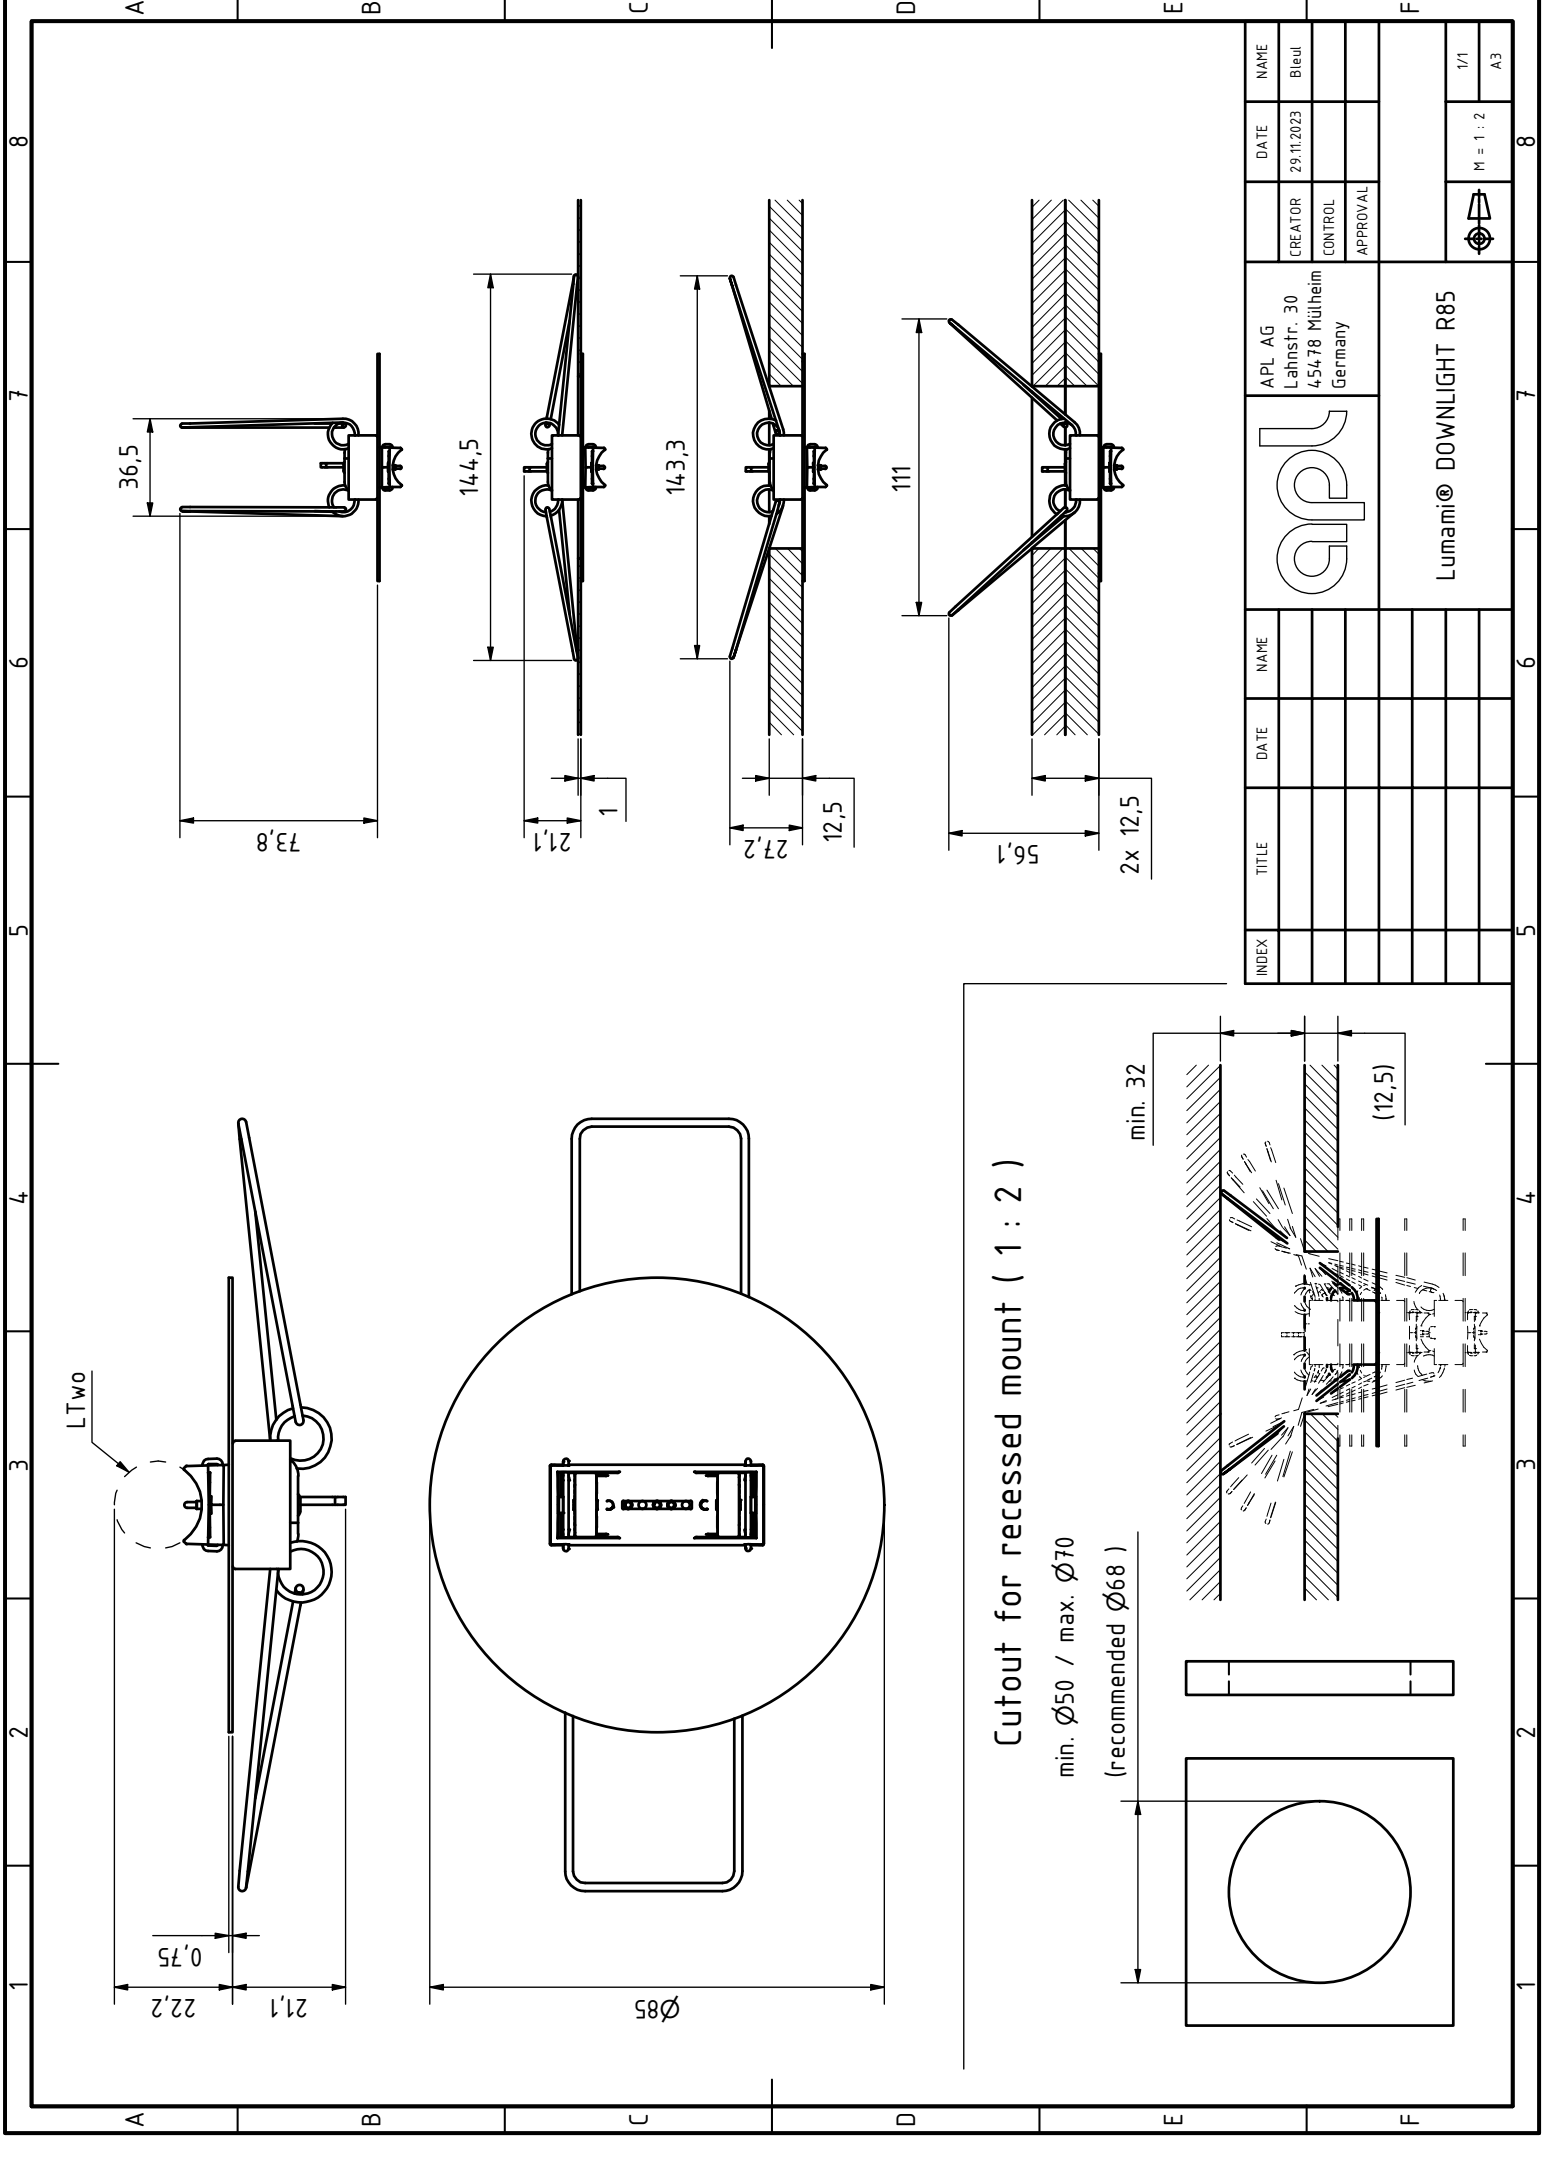
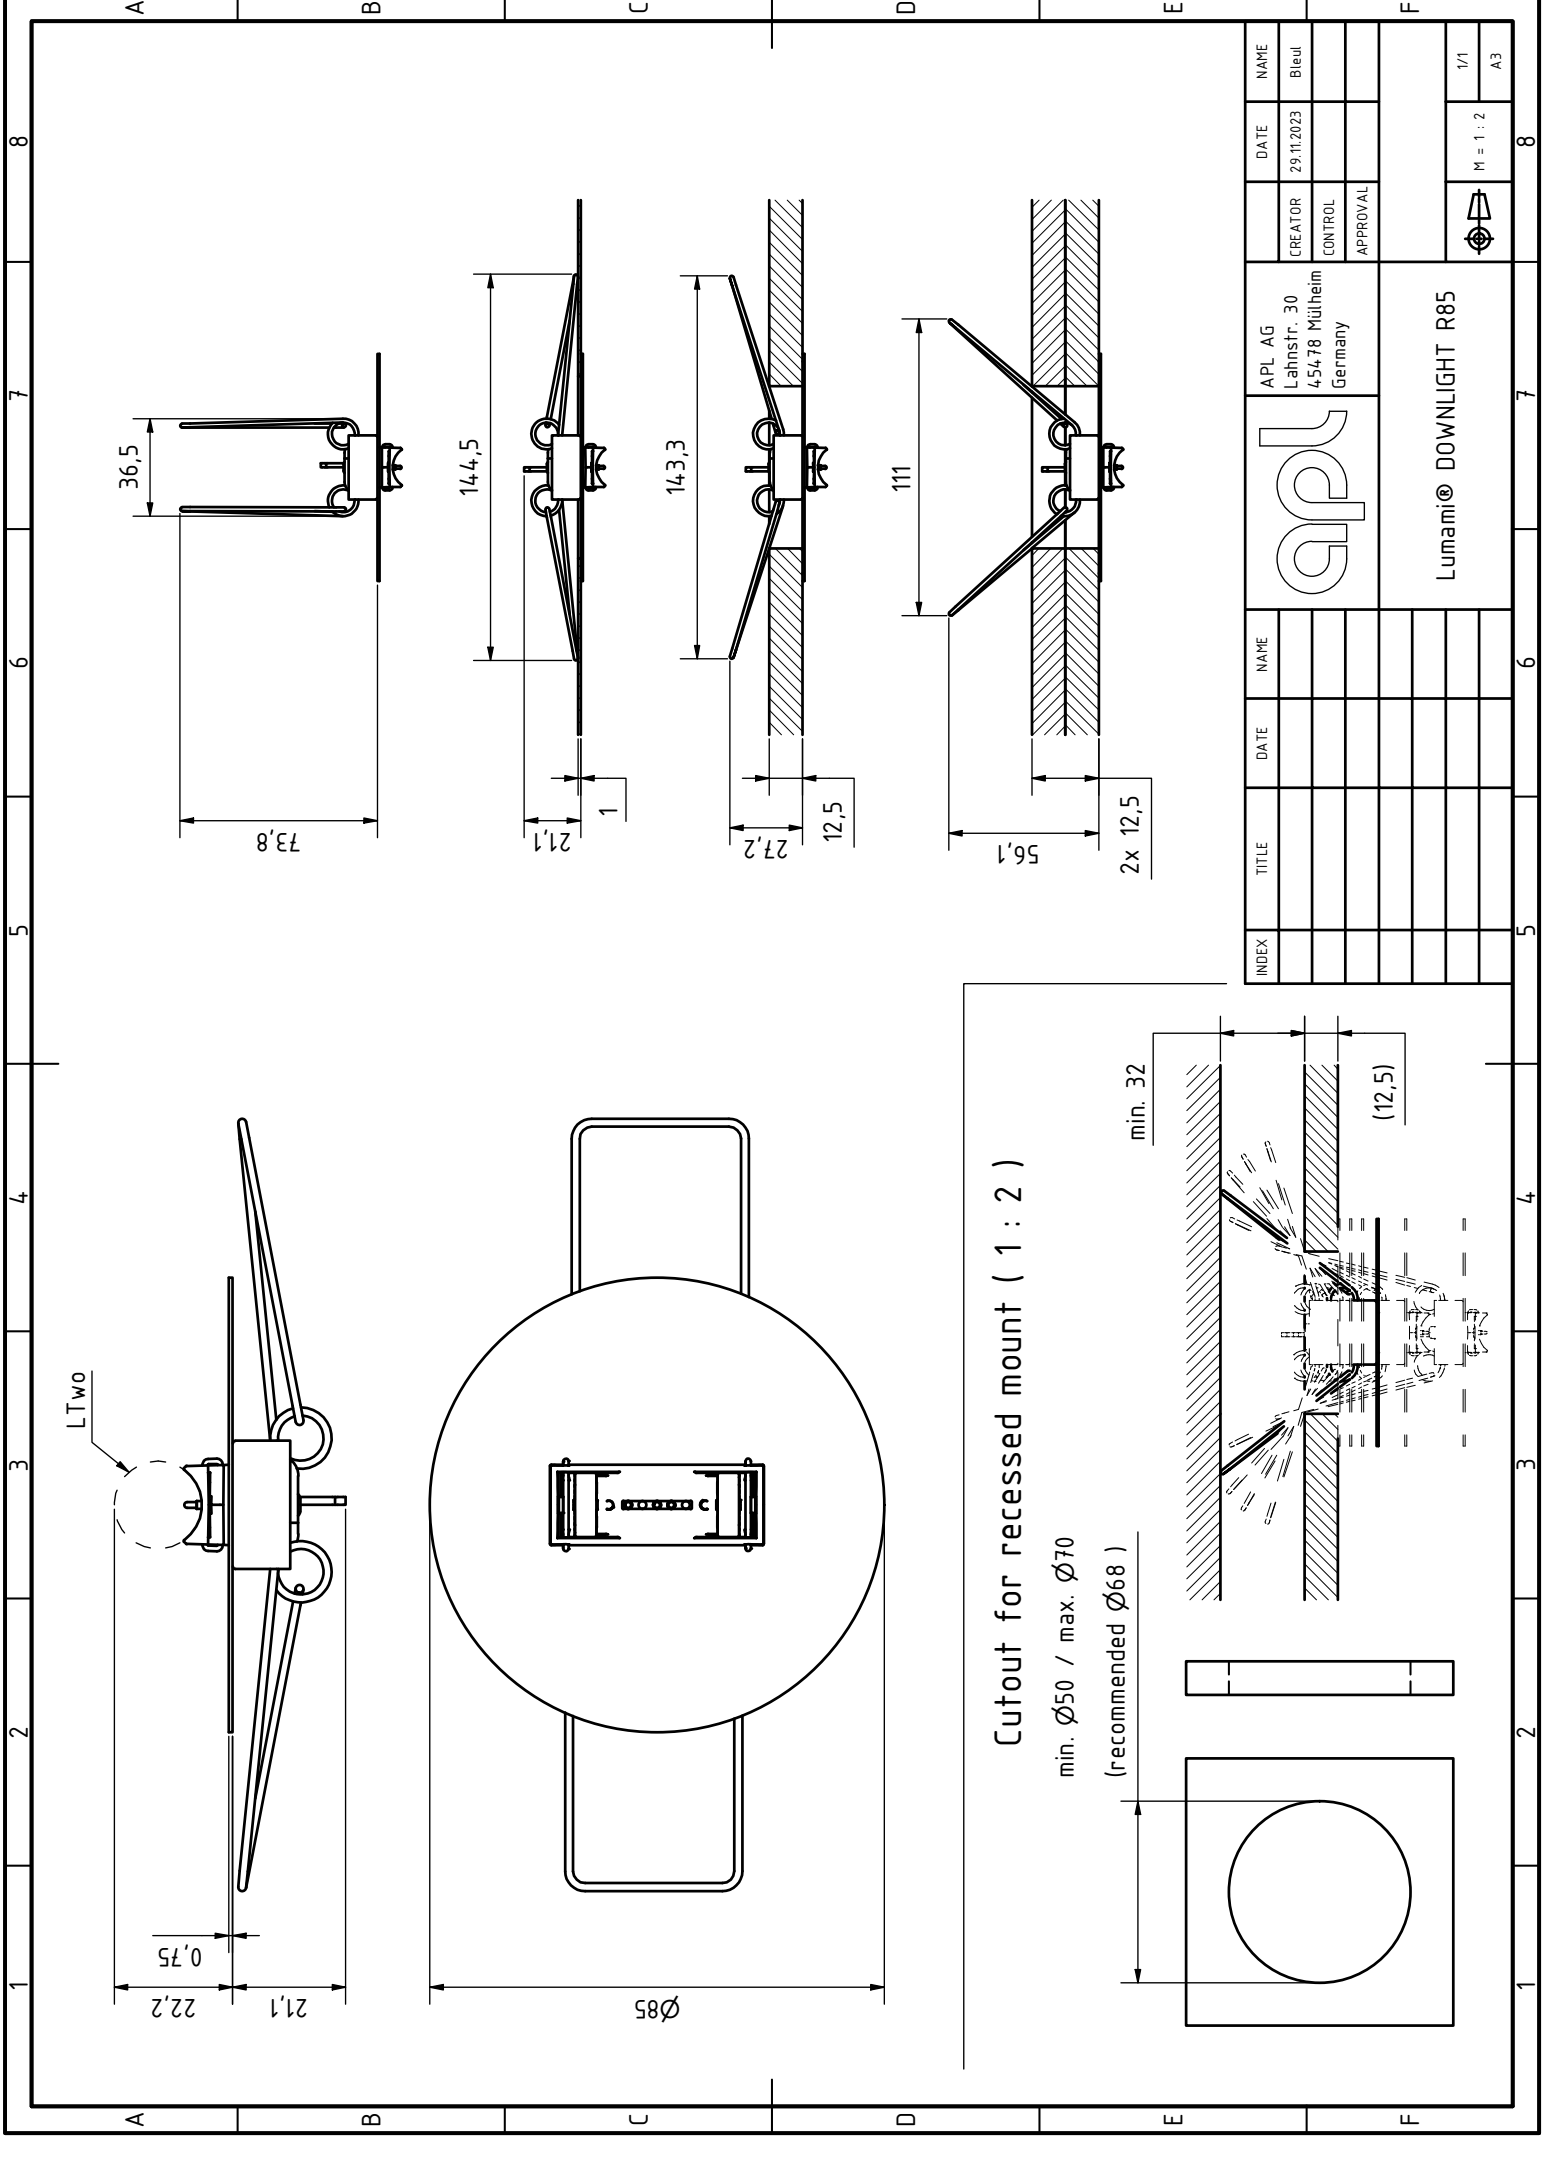
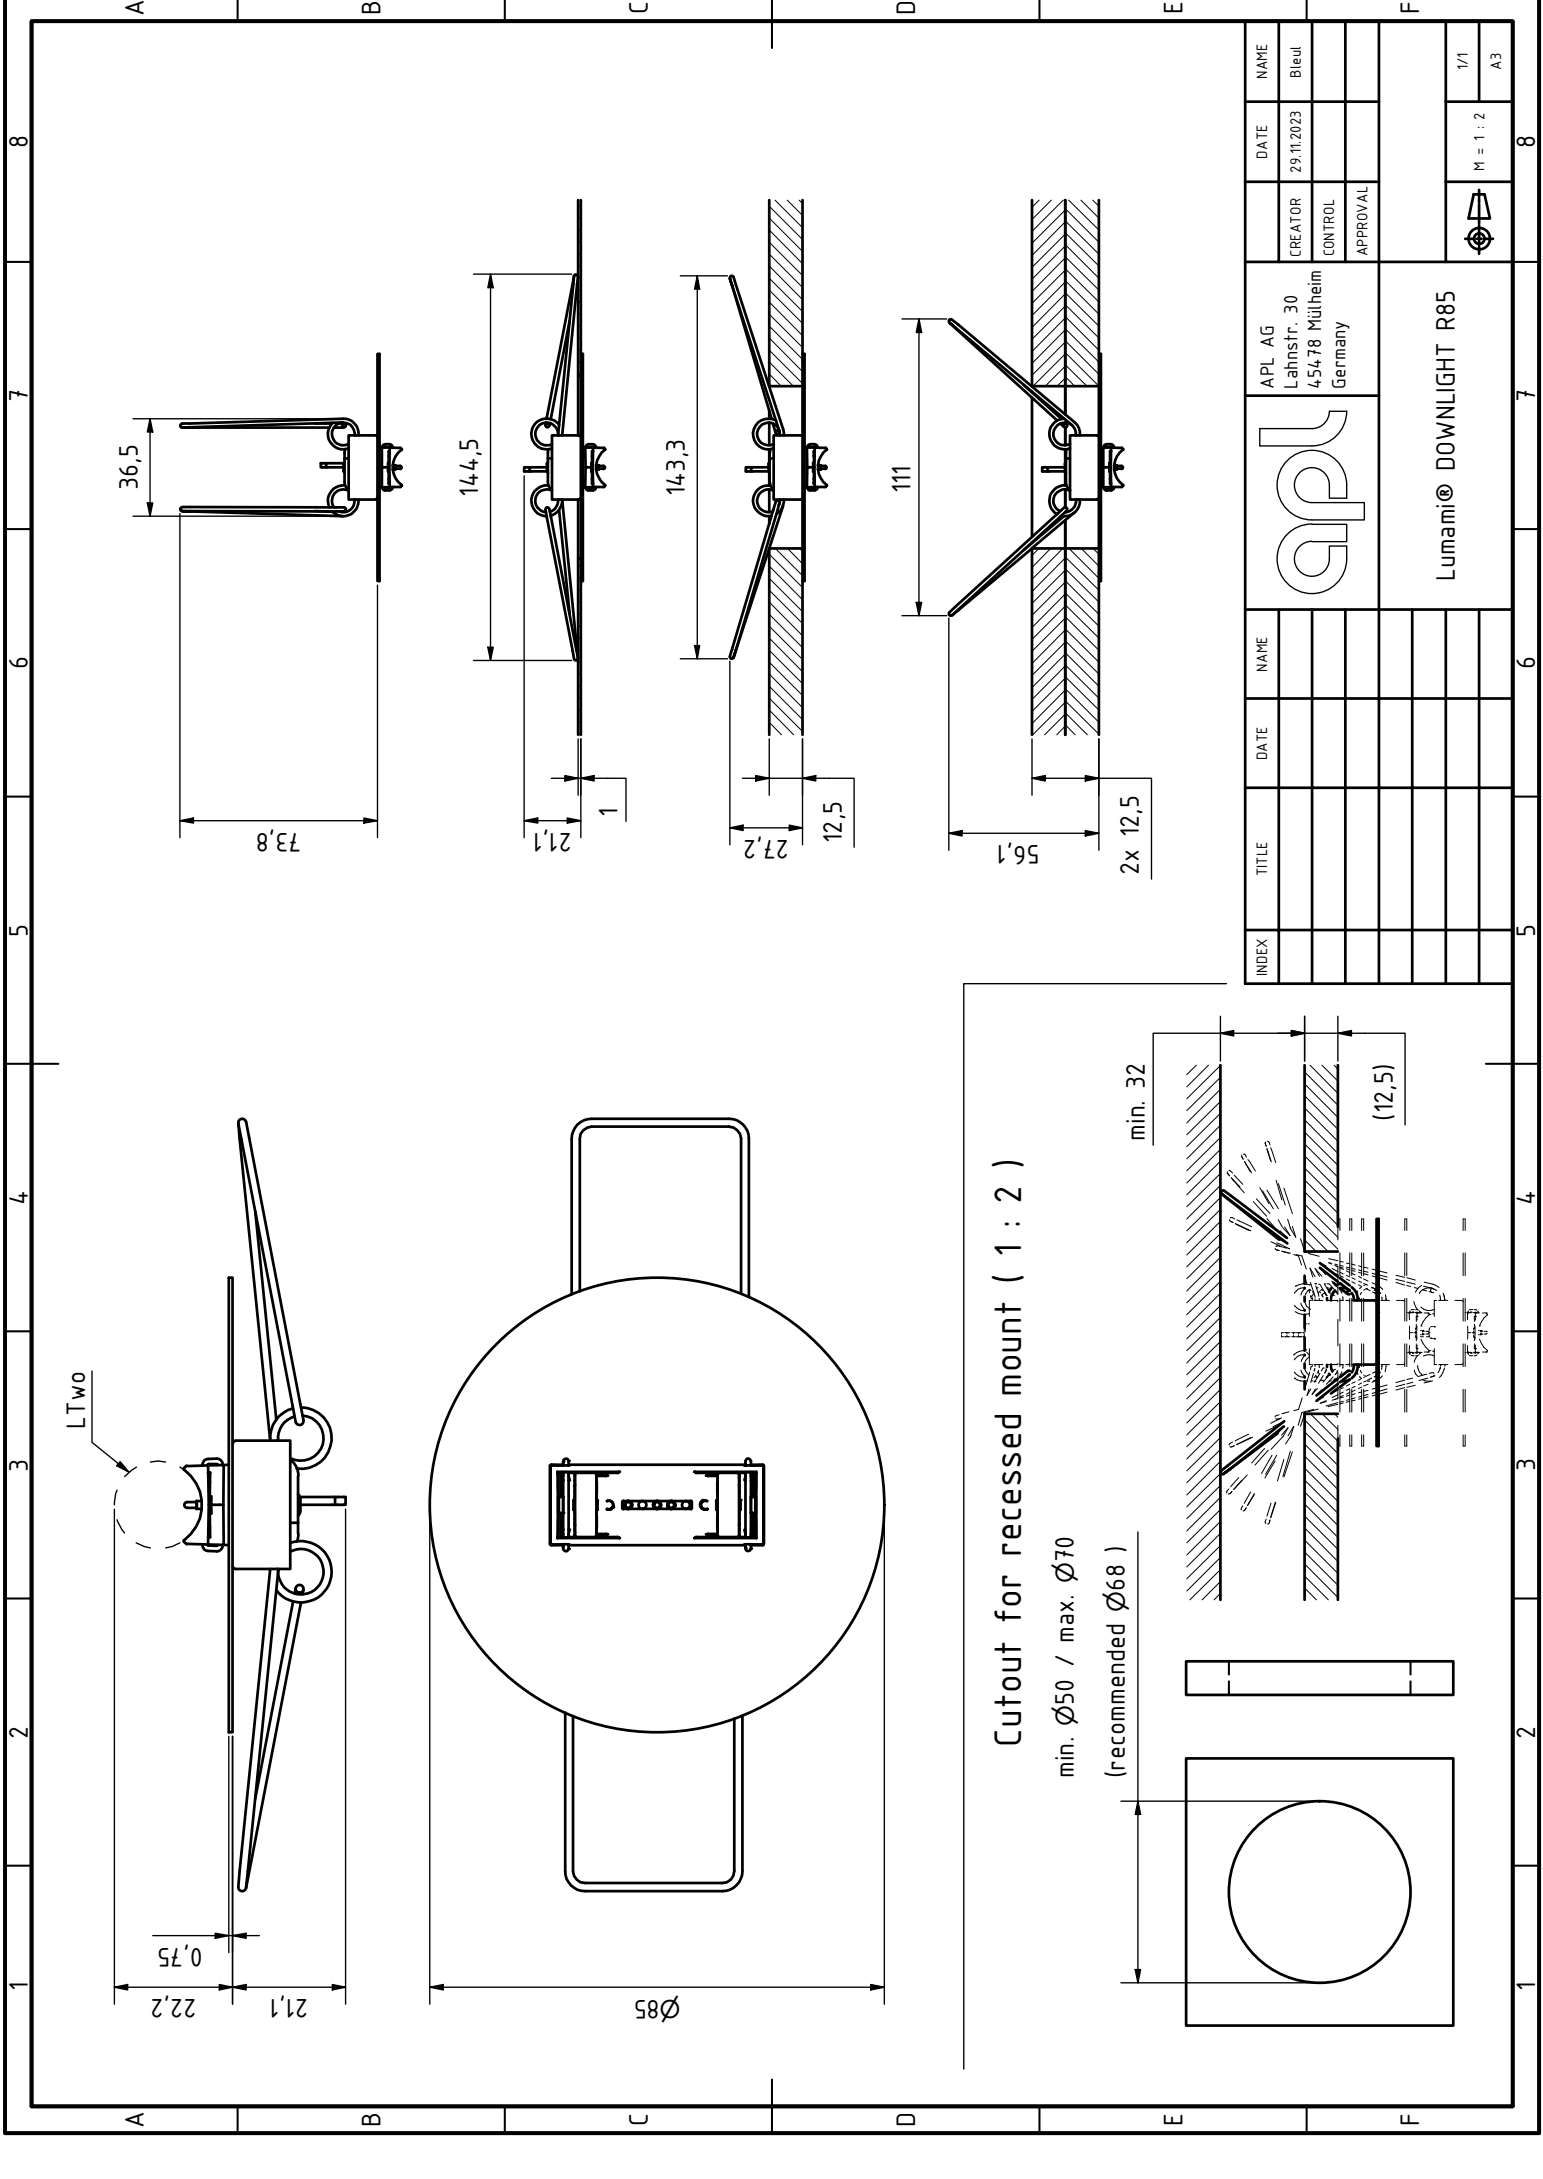
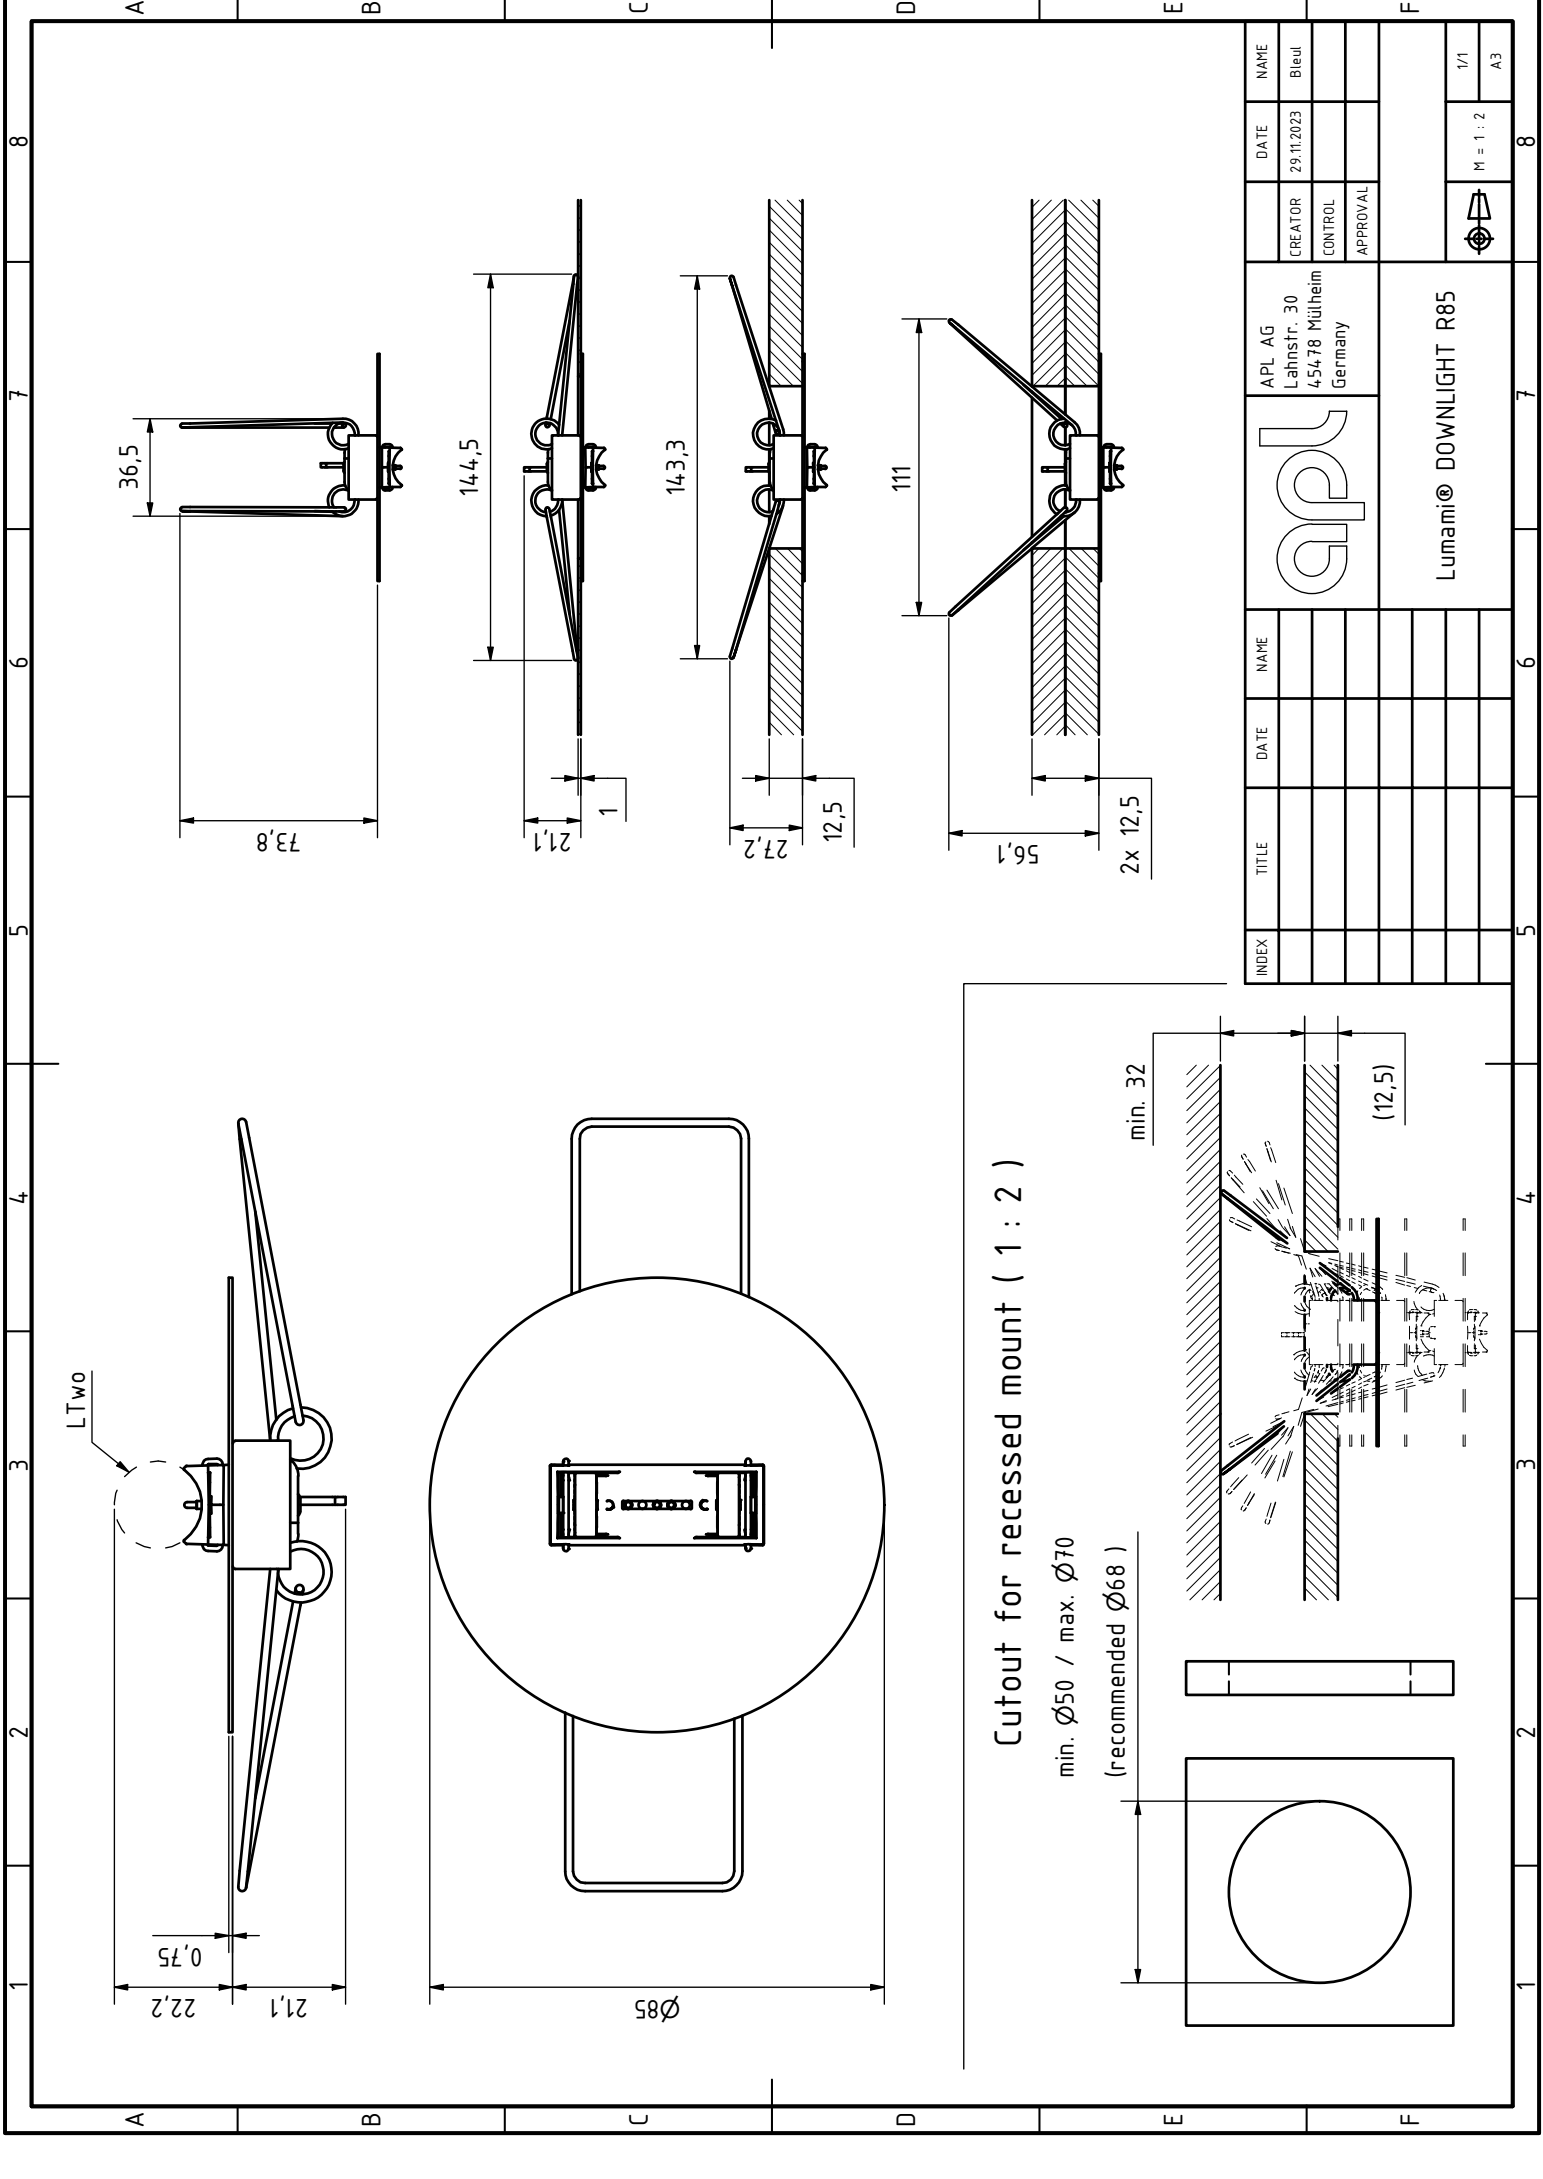
Technical Specifications:

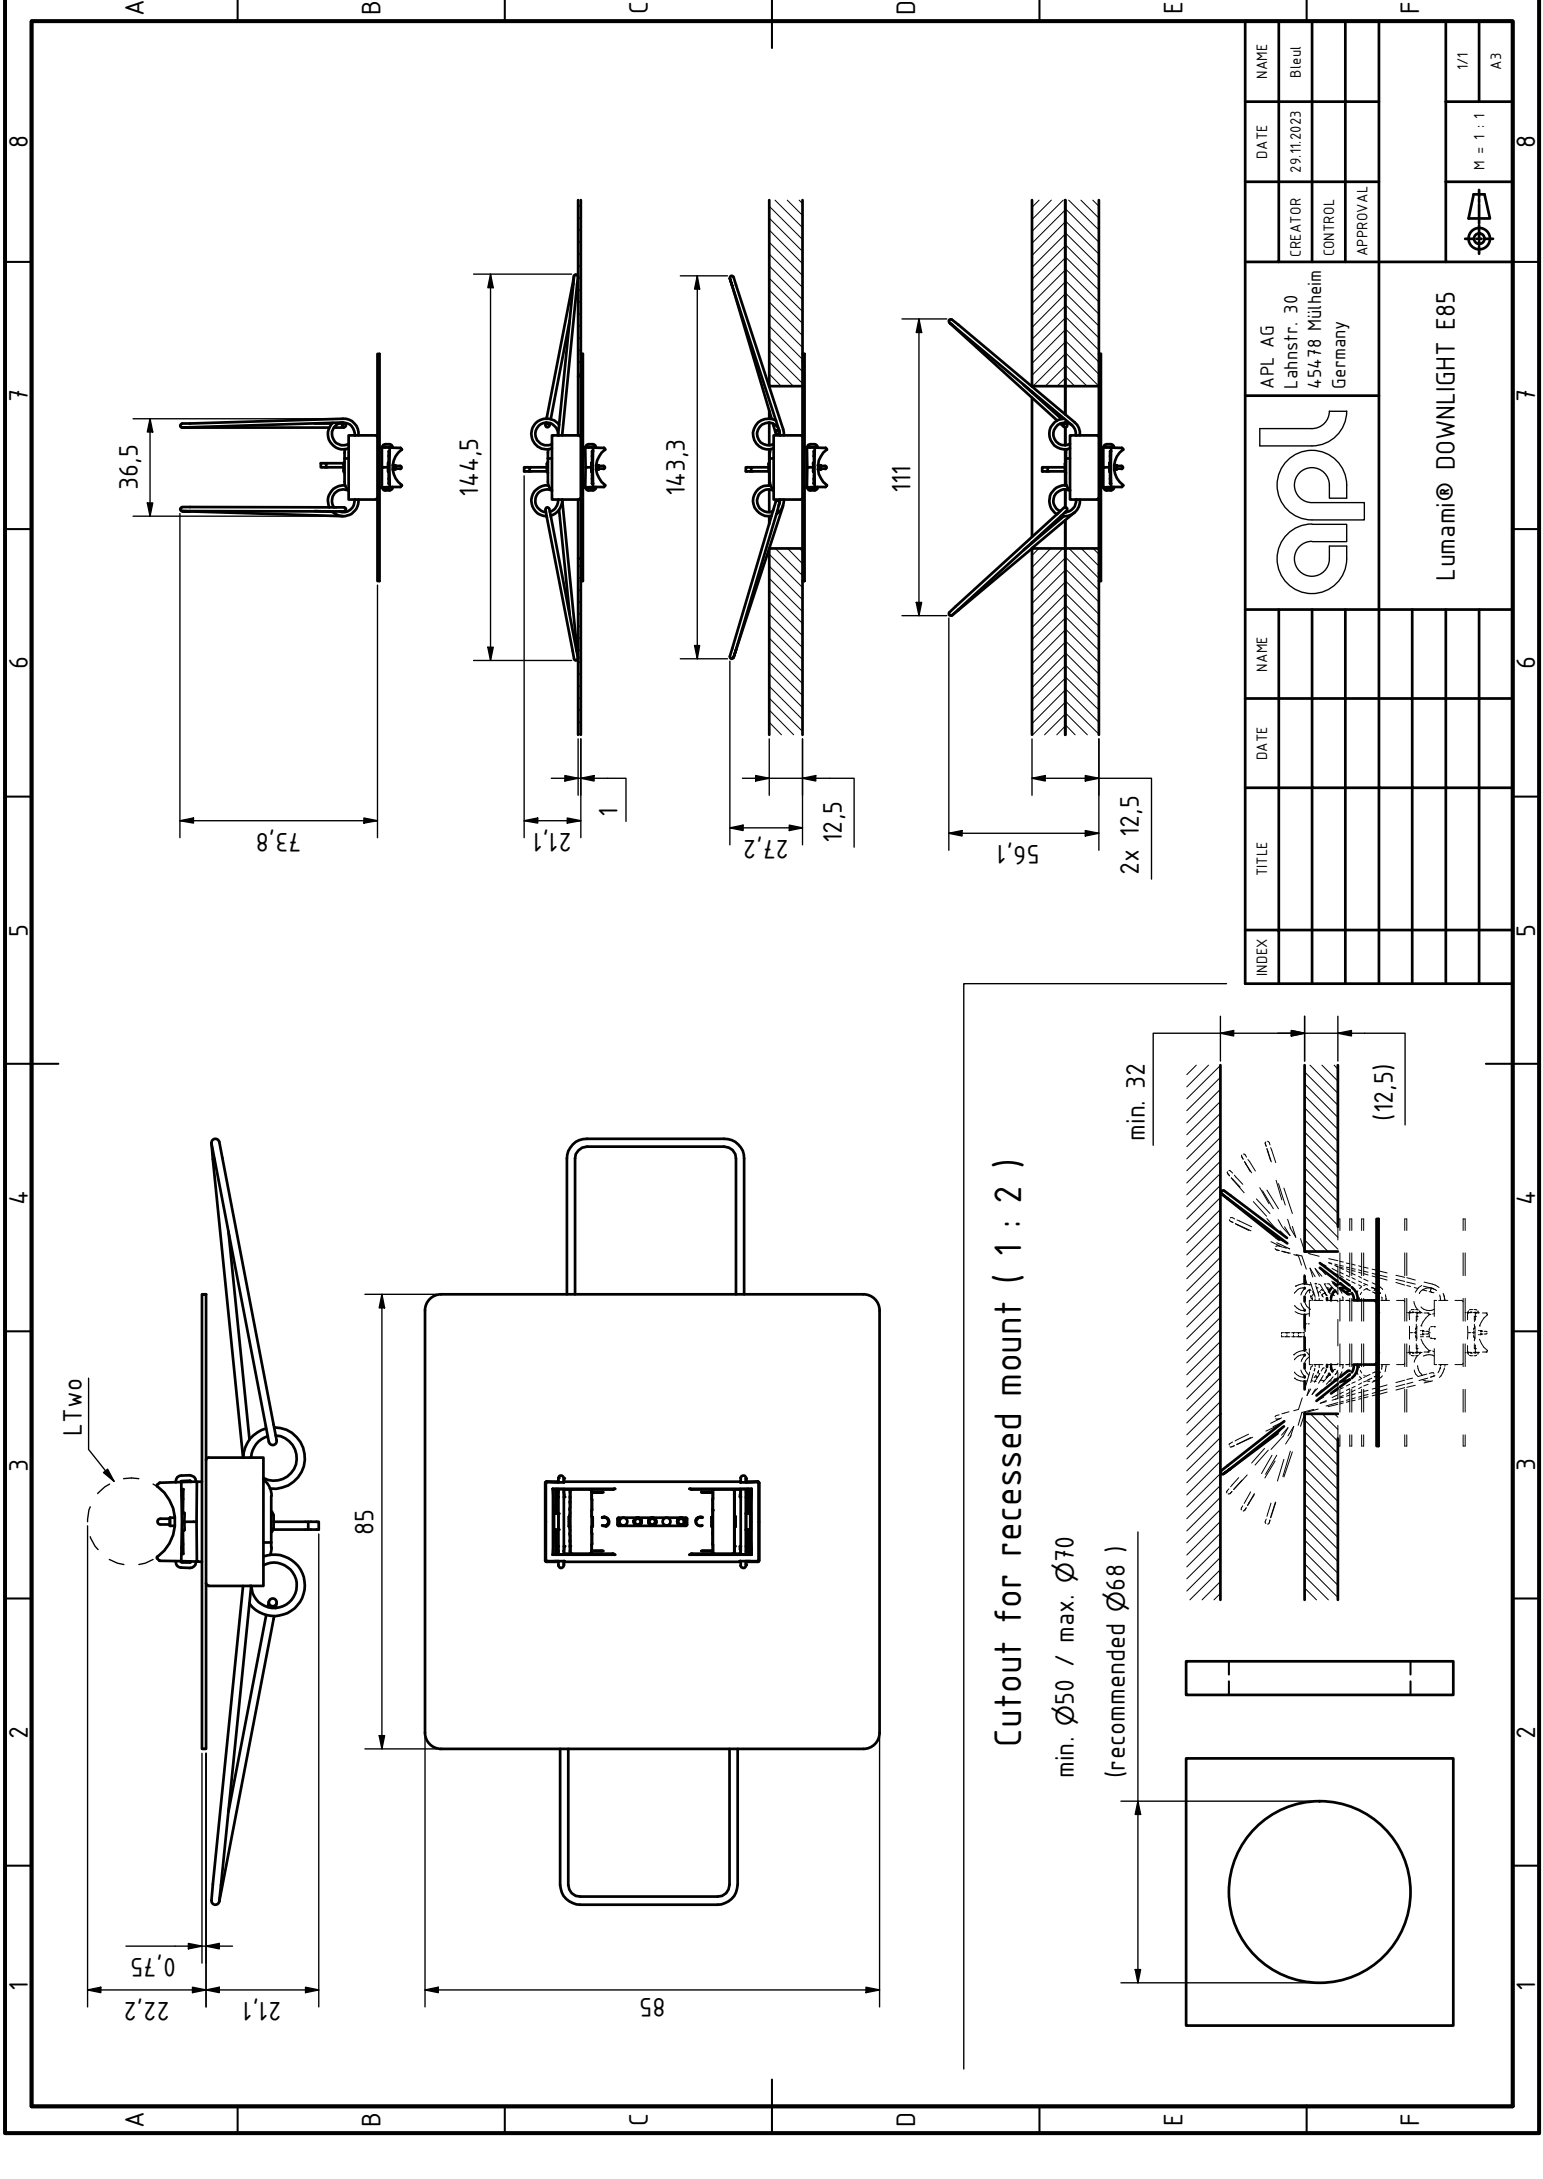
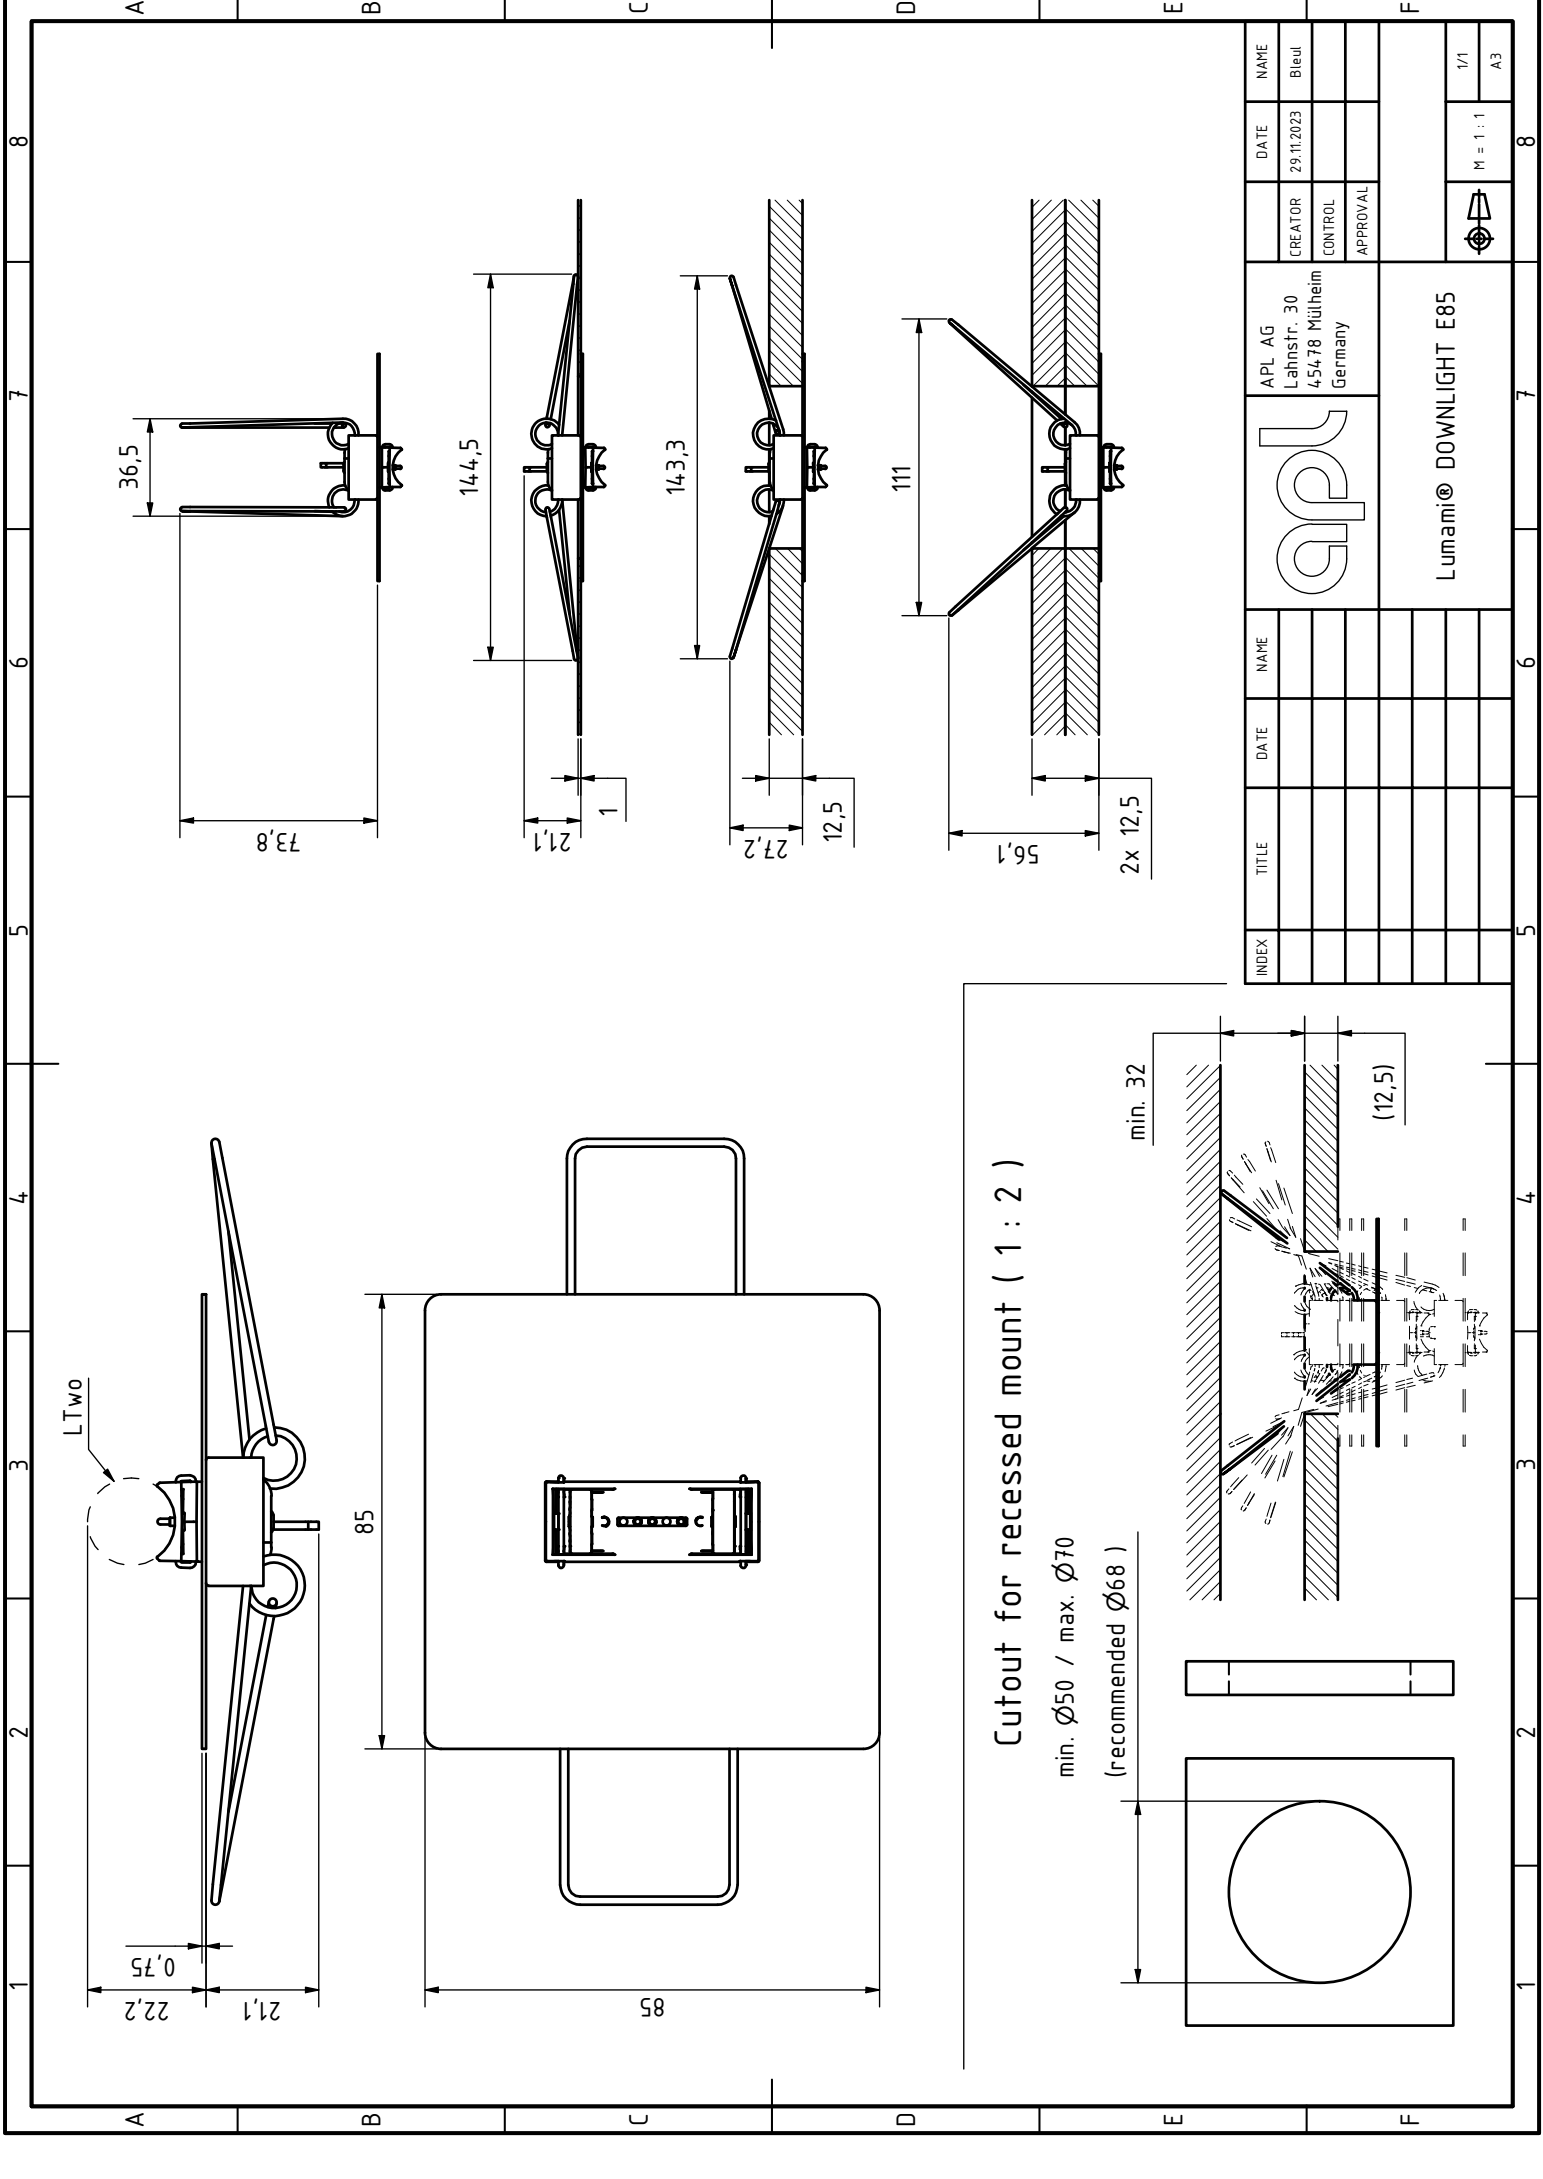
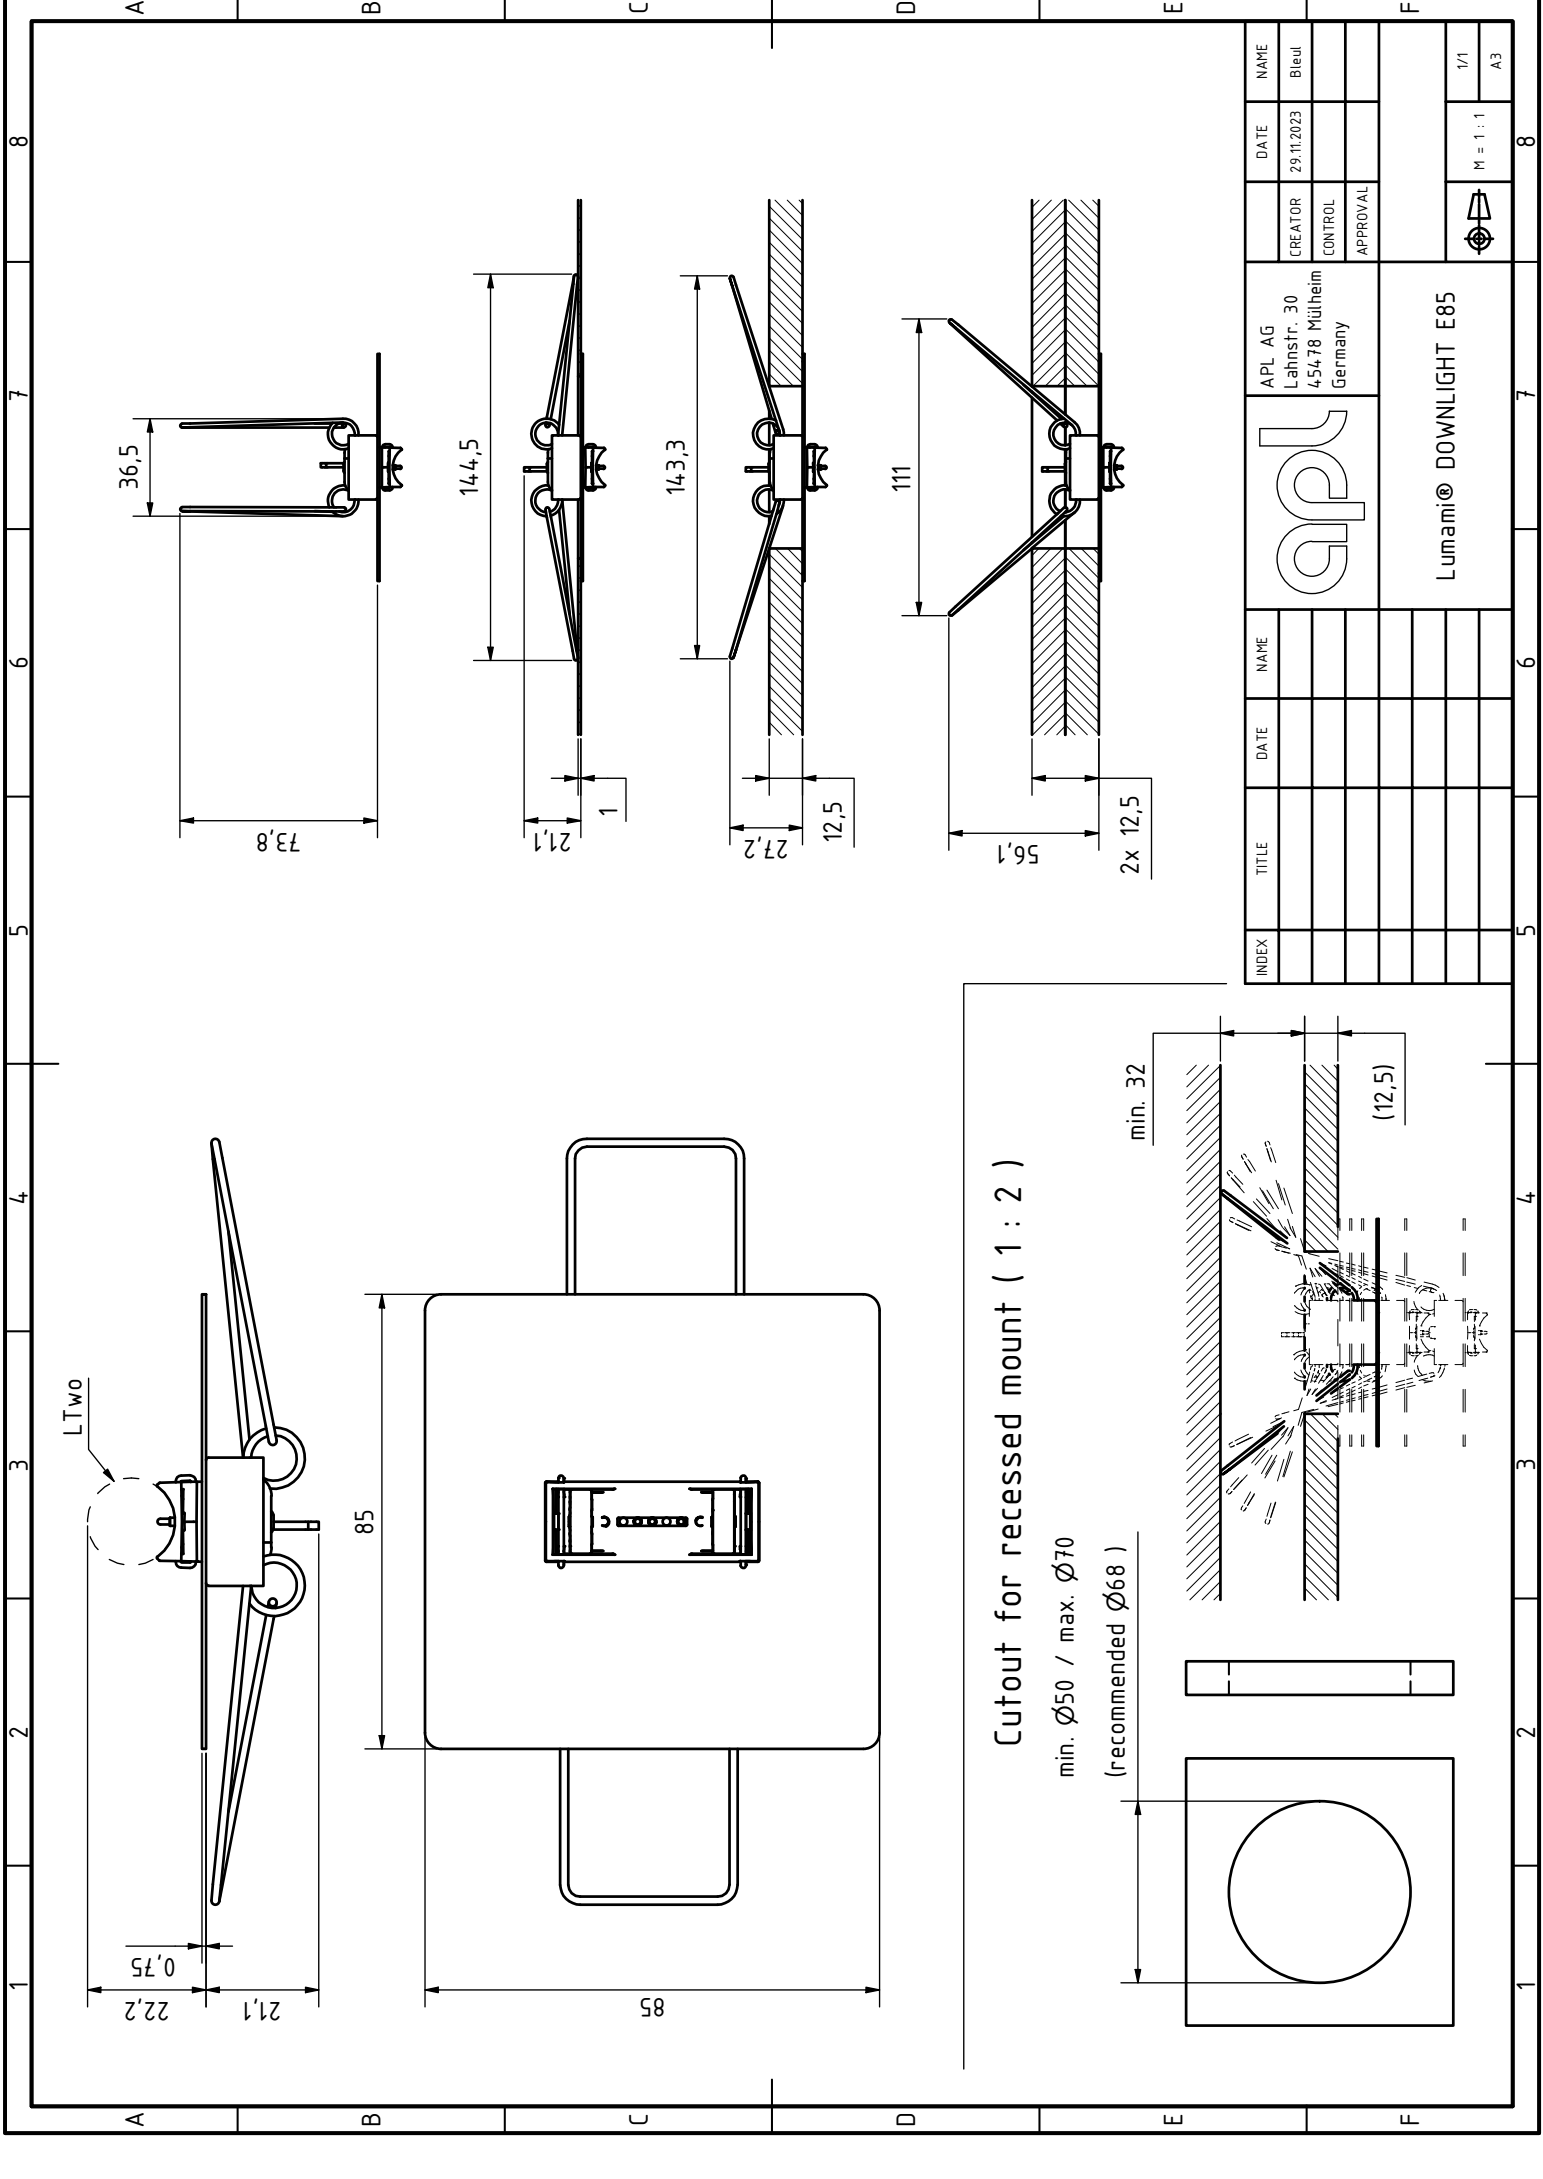
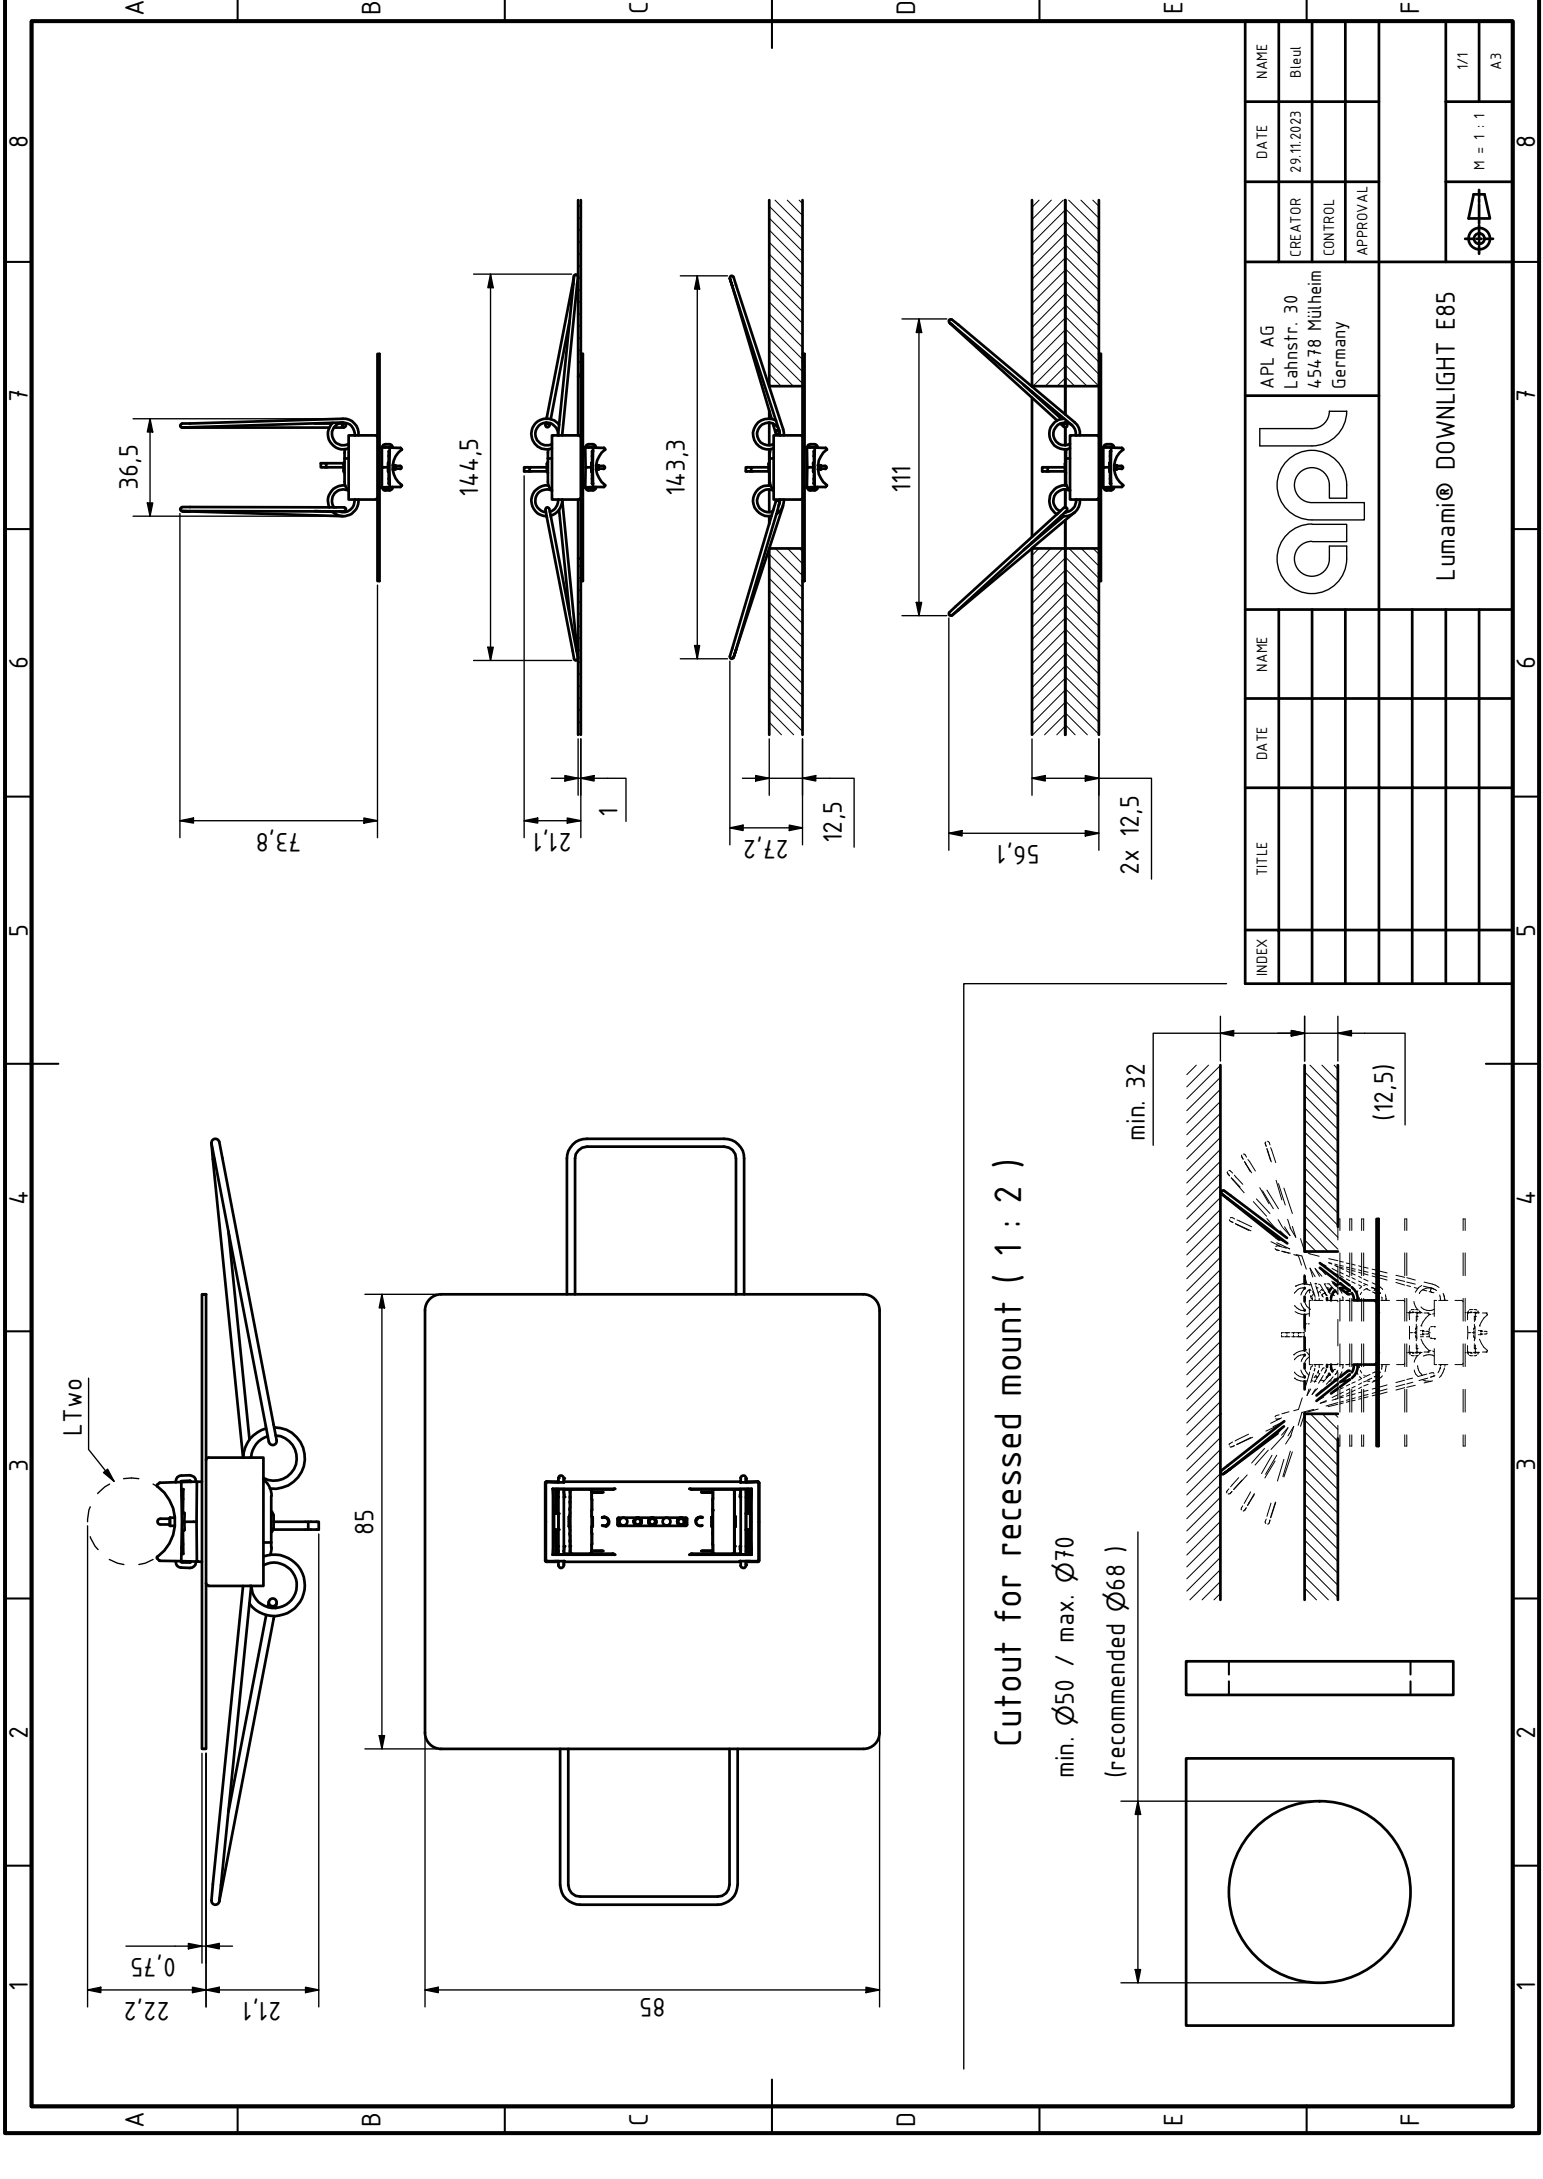
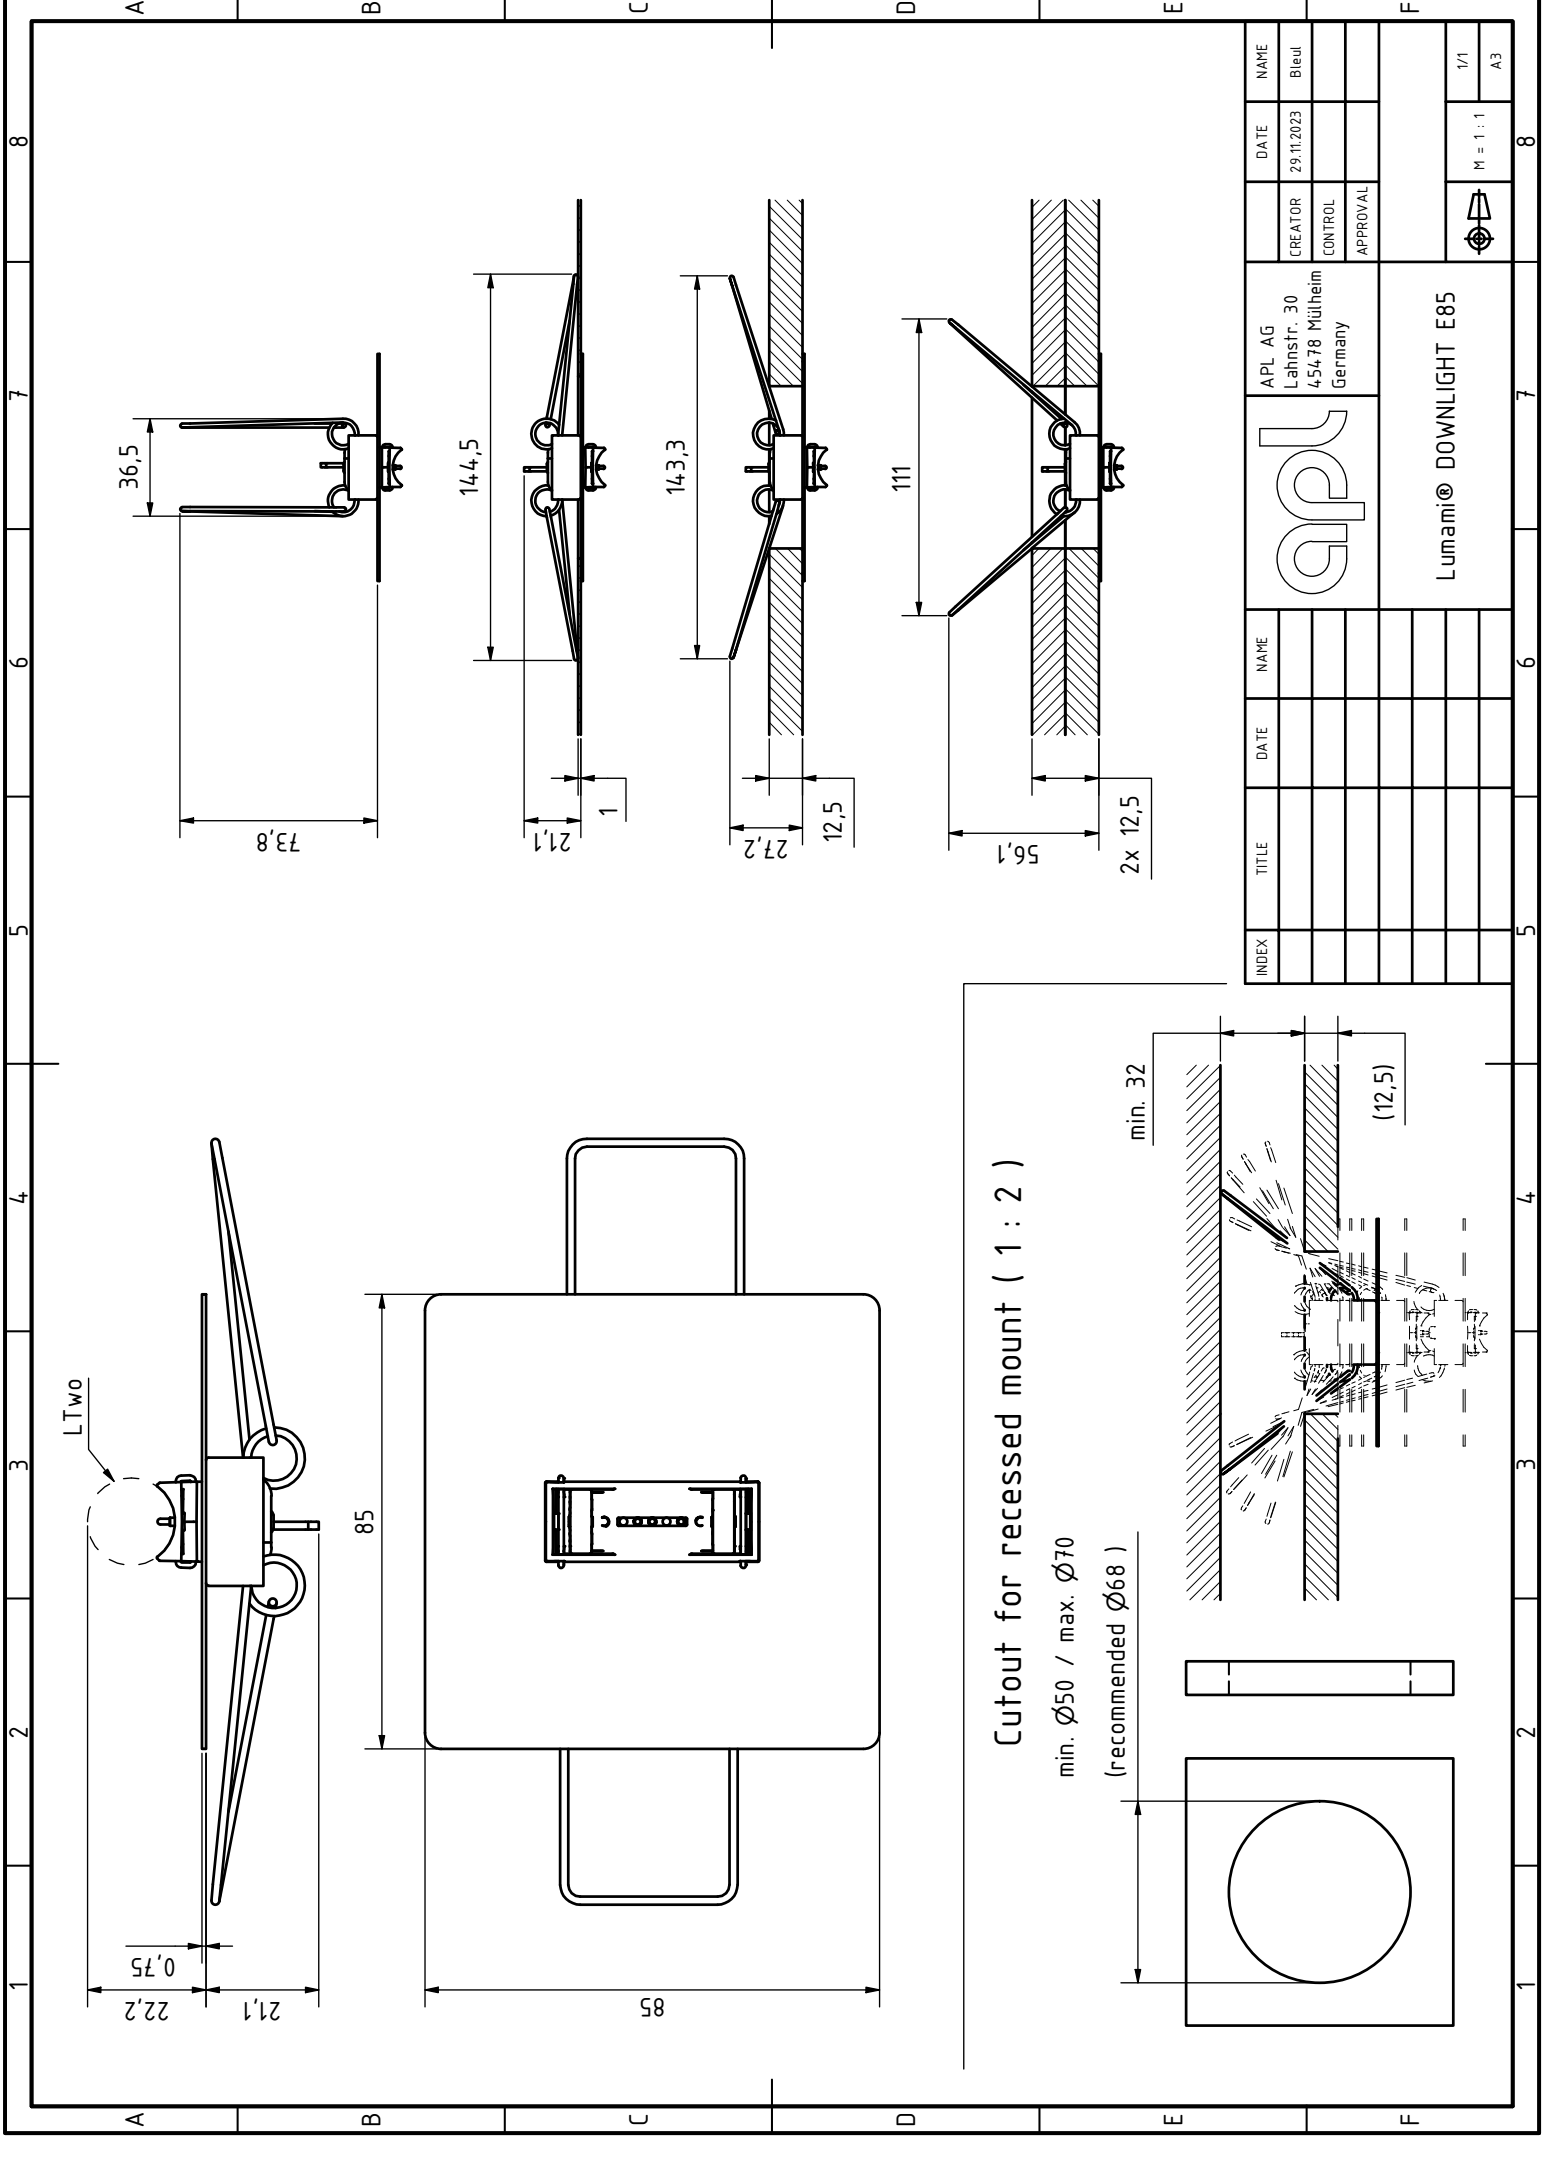
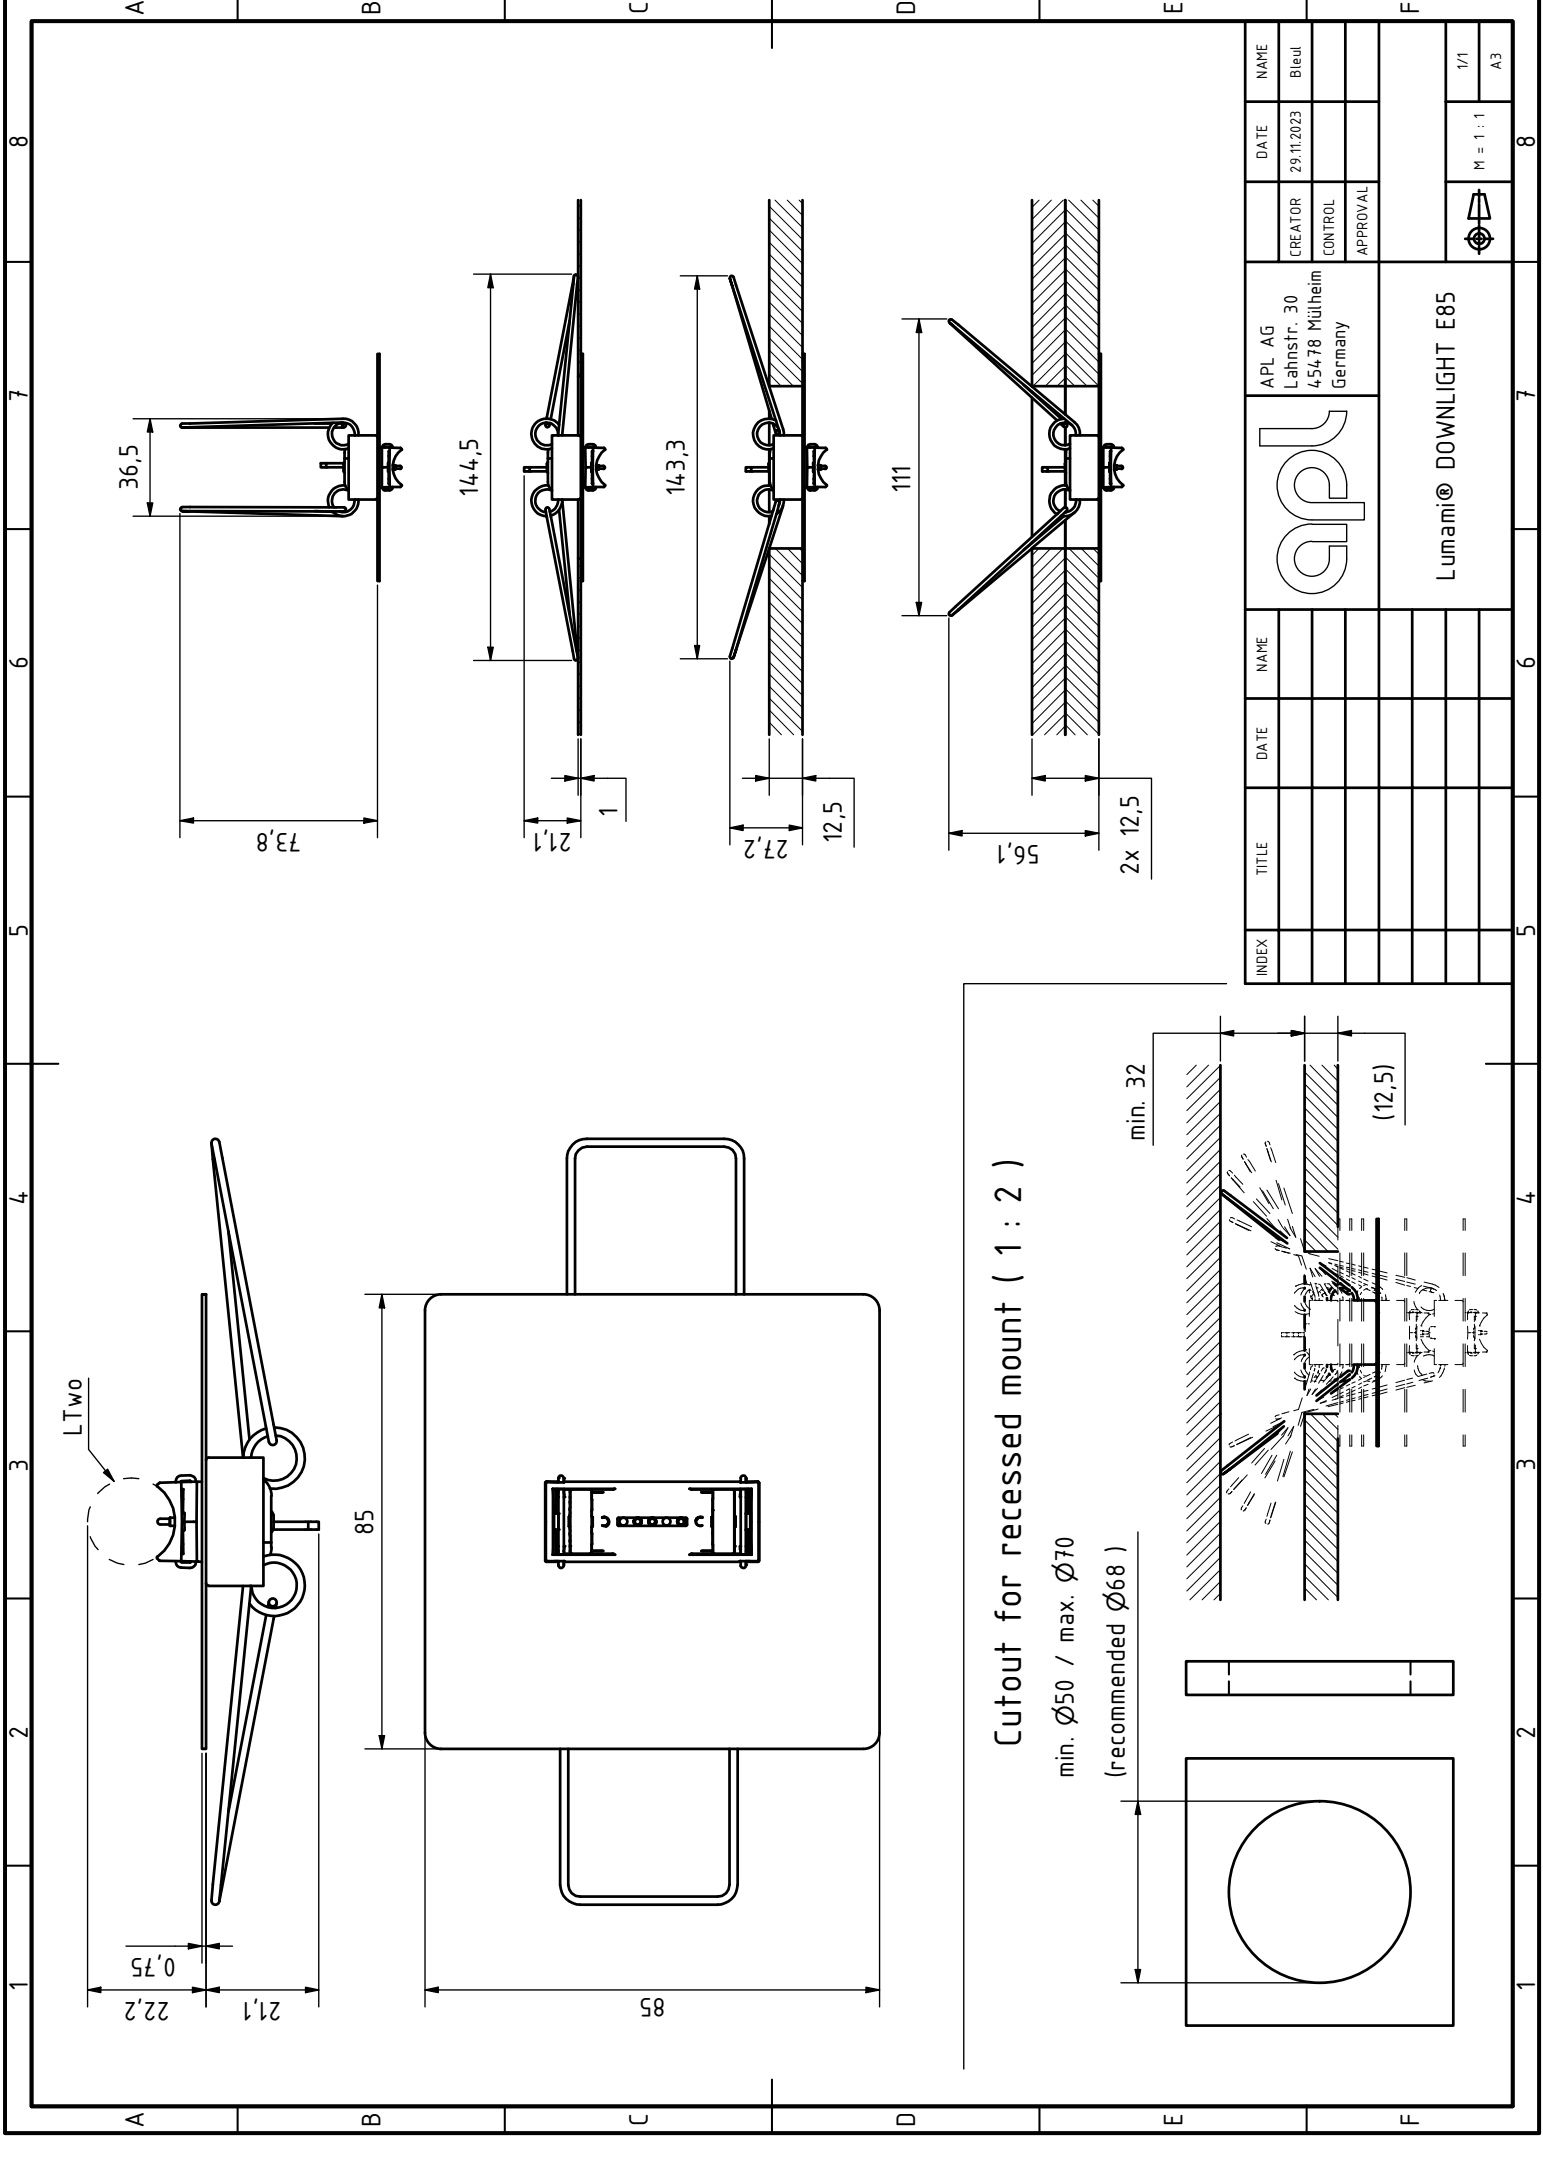
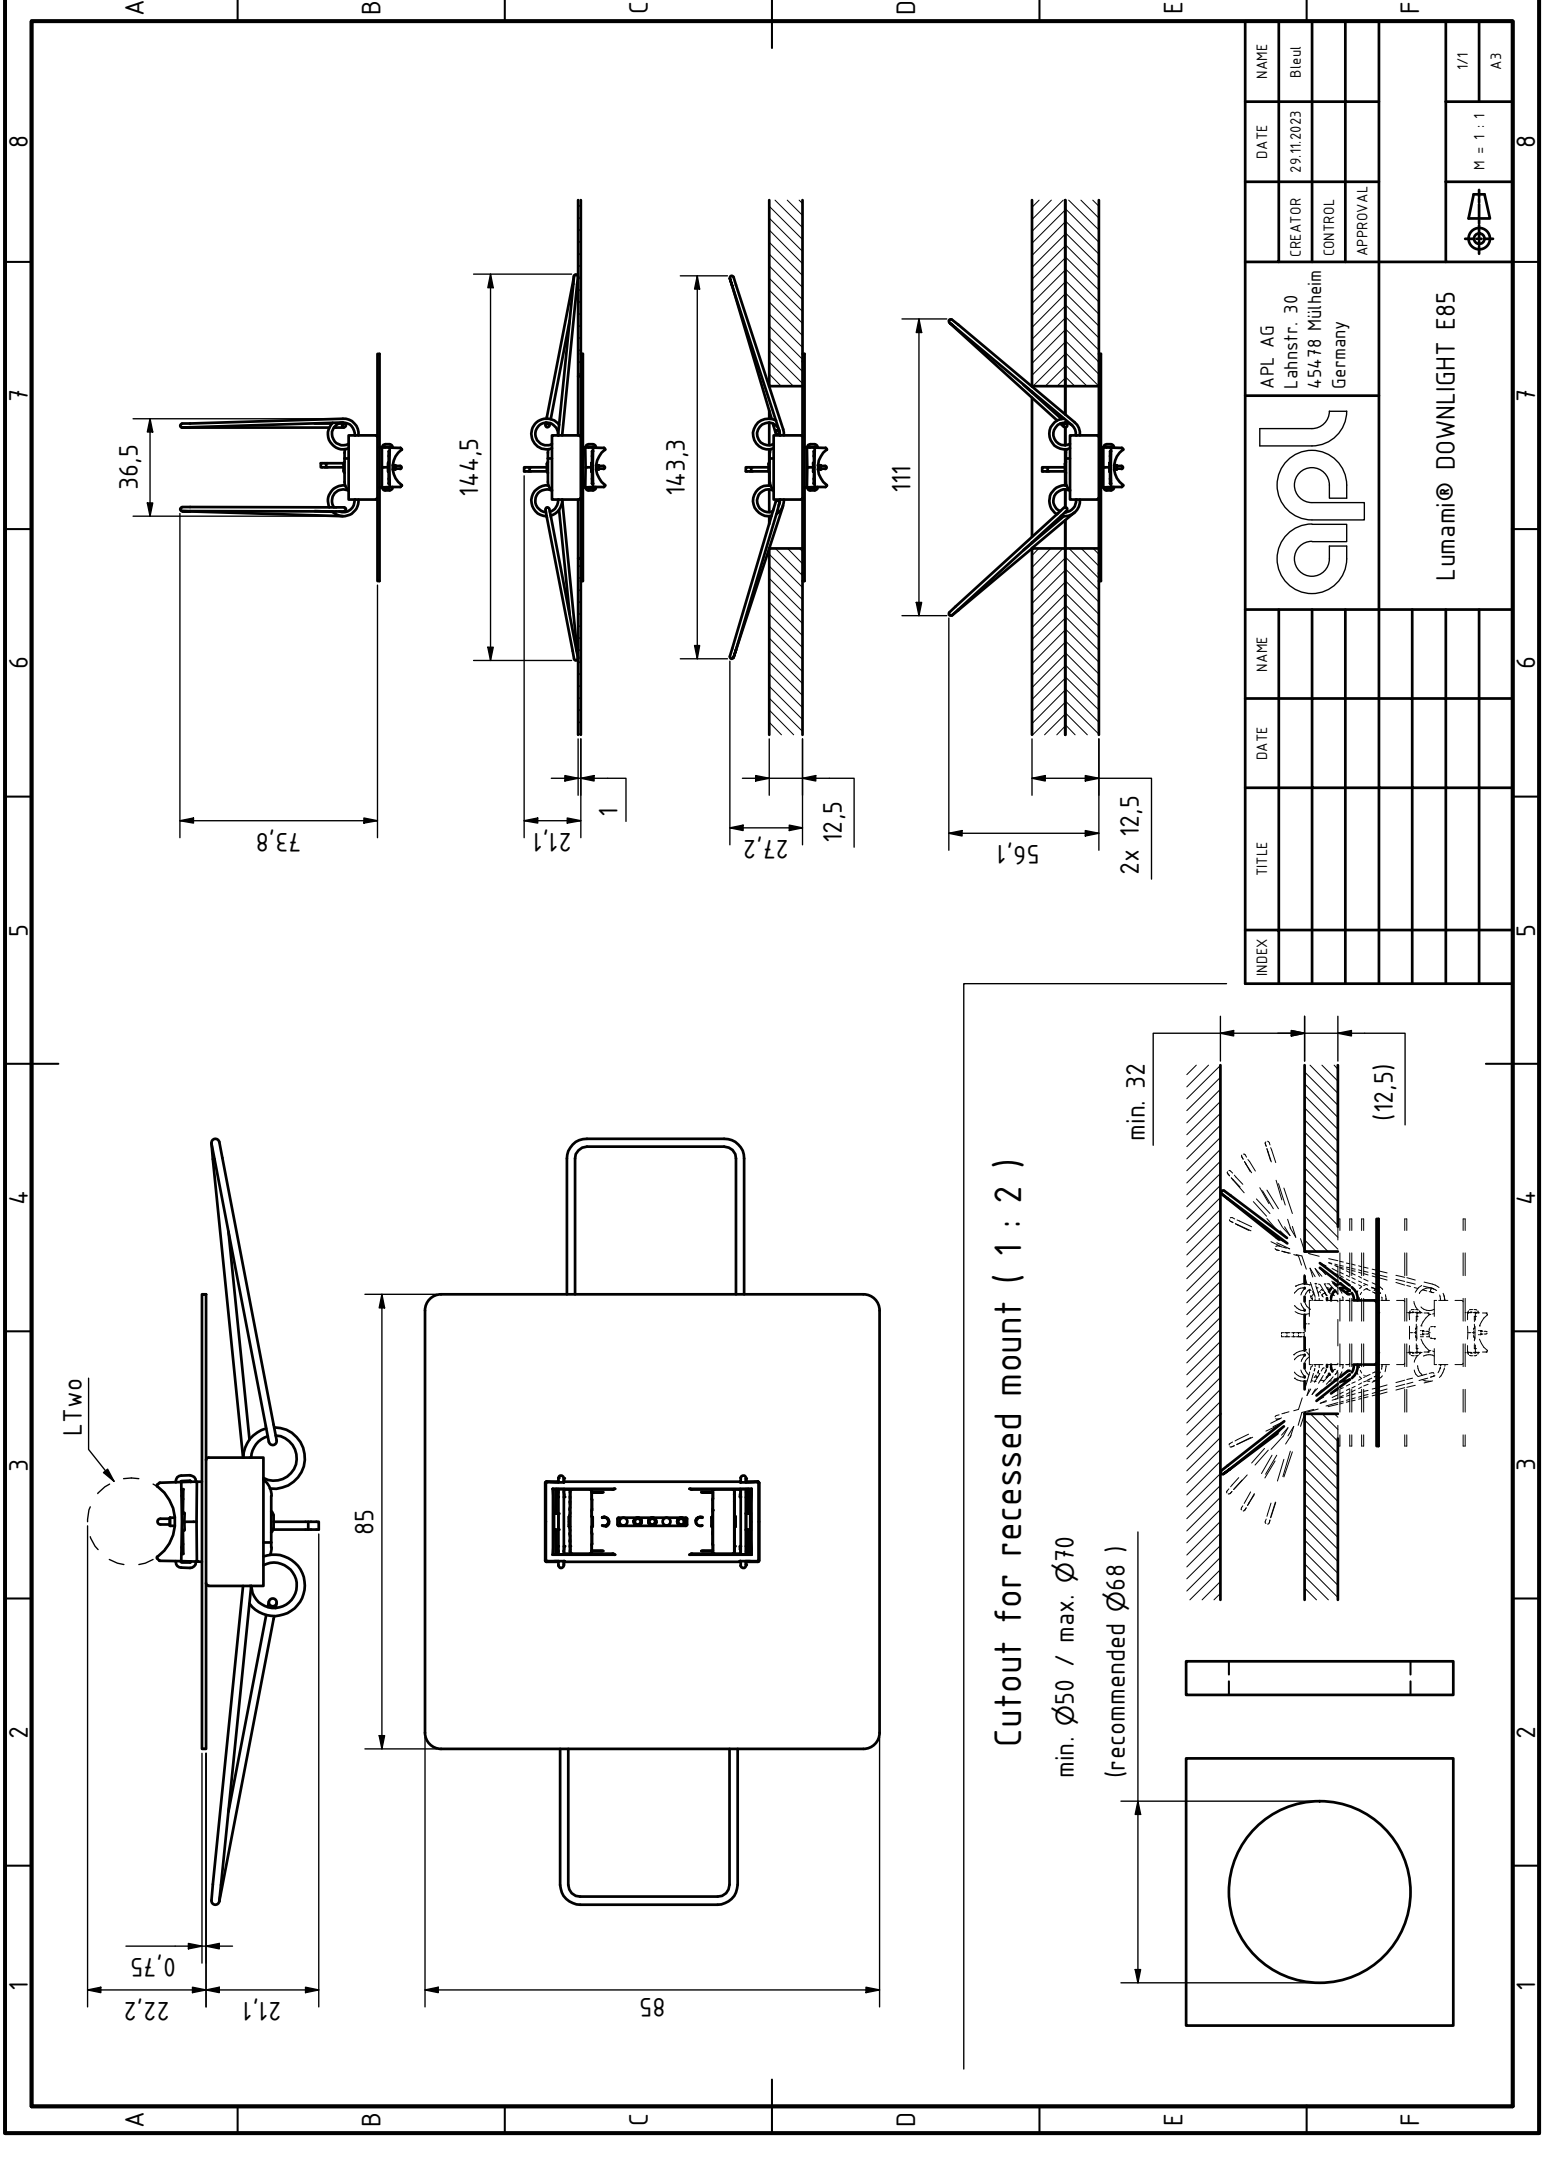
- APL AG**
Lahnstr. 30
45478 Mülheim
Germany
- Lumami® DOWNLIGHT R85**
- DATE:** 29.11.2023
- NAME:** Bleul
- CREATOR:** CONTROL
- APPROVAL:** APPROVAL
- INDEX:** 1/1
- TITLE:** M = 1 : 2
- DATE:** 29.11.2023
- NAME:** Bleul
- CREATOR:** CONTROL
- APPROVAL:** APPROVAL

Cutout for recessed mount (1 : 2)

min. $\varnothing 50$ / max. $\varnothing 70$
(recommended $\varnothing 68$)

min. 32
(12,5)

[illegible][illegible][illegible]

[illegible][illegible][illegible][illegible]