


Lumami® FLUSH BOX

dimmable with TRIAC

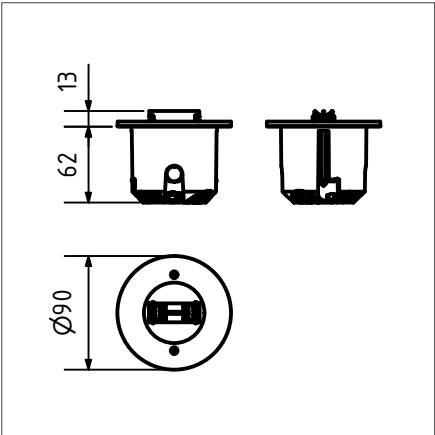

Produktbeschreibung

Die Einbauleuchte Lumami® FLUSH BOX mit der magnetischen Lampenfassung MS5, ist über TRIAC dimmbar und bis zu 350° drehbar. Zur Verwendung der LTwo® MAG in Konstantstrom mit einer Länge von 562 – 842 mm. Mit bis zu 3.200 Lumen und 12 verschiedenen Optiken (von Narrowsspot, über Wide Flood (UGR<19) bis Wallwasher). Die 68 mm Hohlwanddose von Kaiser beinhaltet das Vorschaltgerät und ist für die Montage mit einer Plattenstärke von 7 bis 40 mm geeignet. Verfügbar in Weiß und Schwarz.

Product description

The Lumami® FLUSH BOX recessed luminaire with MS5 magnetic socket is dimmable via TRIAC and can be rotated up to 350°. For use with the LTwo® MAG in constant current with a length of 562 – 842 mm. With up to 3,200 lumens and 12 different optics (from narrow spot to wide flood (UGR<19) and wallwasher). The 68 mm cavity wall box from Kaiser contains the power supply unit and is suitable for mounting with a panel thickness of 7 to 40 mm. Available in white and black.

Produkteigenschaften / Product features



Product	OP	Color	L x W x H	Art. No.
Lumami FLUSH BOX in constant current for LTwo MAG 562-842mm – Dimmable with TRIAC – White	CC	white	90 x 90 x 75 mm	18376
Lumami FLUSH BOX in constant current for LTwo MAG 562-842mm – Dimmable with TRIAC – Black	CC	black	90 x 90 x 75 mm	18377

LTwo® MAGNETIC

constant current 21 W/m (500 mA)

CRI 90 / 4000K

Optic	Color	10°HB	13°	25°	40°	60°	Batwing wide	Batwing narrow	Wall wash	Oval	Opal	Diffuse	Clear
562 mm	white	1379 lm	1336 lm	1323 lm	1317 lm	1354 lm	1318 lm	1280 lm	1355 lm	1225 lm	1983 lm	2104 lm	2145 lm
	black	1301 lm	1257 lm	1235 lm	1188 lm	1237 lm	1145 lm	990 lm	1229 lm	1173 lm	1540 lm	1857 lm	1911 lm
842 mm	white	2068 lm	2004 lm	1984 lm	1975 lm	2031 lm	1976 lm	1920 lm	2032 lm	1838 lm	2974 lm	3156 lm	3218 lm
	black	1952 lm	1886 lm	1853 lm	1782 lm	1855 lm	1718 lm	1485 lm	1844 lm	1760 lm	2310 lm	2786 lm	2866 lm

Optische und elektronische Daten haben eine Toleranz von ±10 %. / Optical and electronic data have a tolerance of ±10 %.

Konfiguration der Leuchte / *Configuration of the luminaire*



Lumami®

1x Lumami® FLUSH BOX in constant current for LTtwo MAG



<https://apl.ag/products/lumami/flushbox>

+



LTtwo®

1x LTtwo® MAG in constant current



<https://apl.ag/products/ltwo/ltwomag>

=



Lumami® + LTtwo®

Fertig konfigurierte Leuchte für dein Projekt.

Ready configured luminaire for your project.



1234

A

A

B

B

C

C

D




D


E

E

F

F

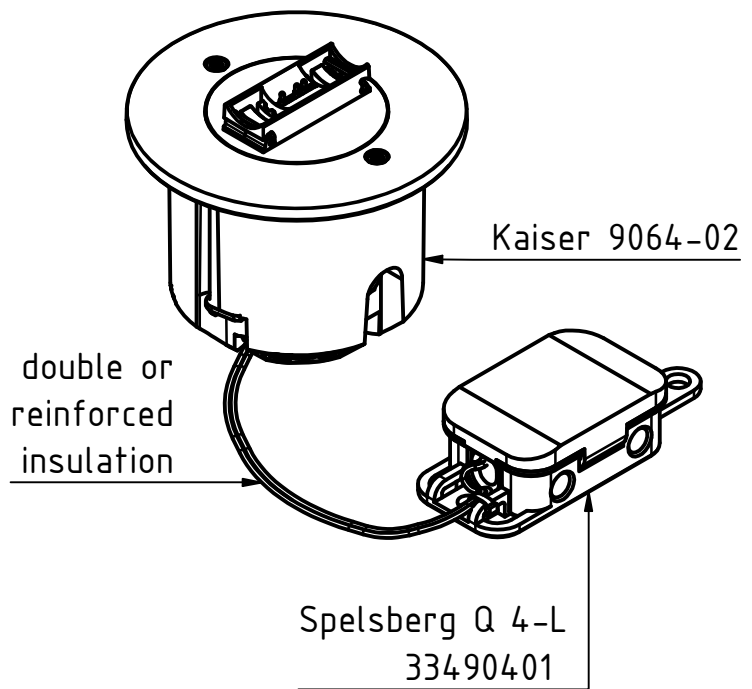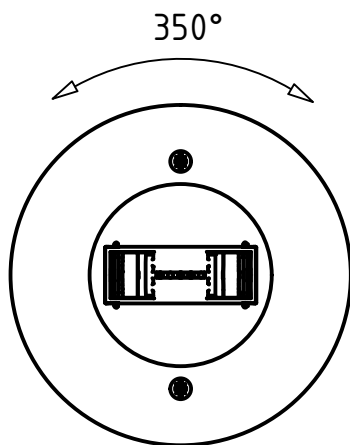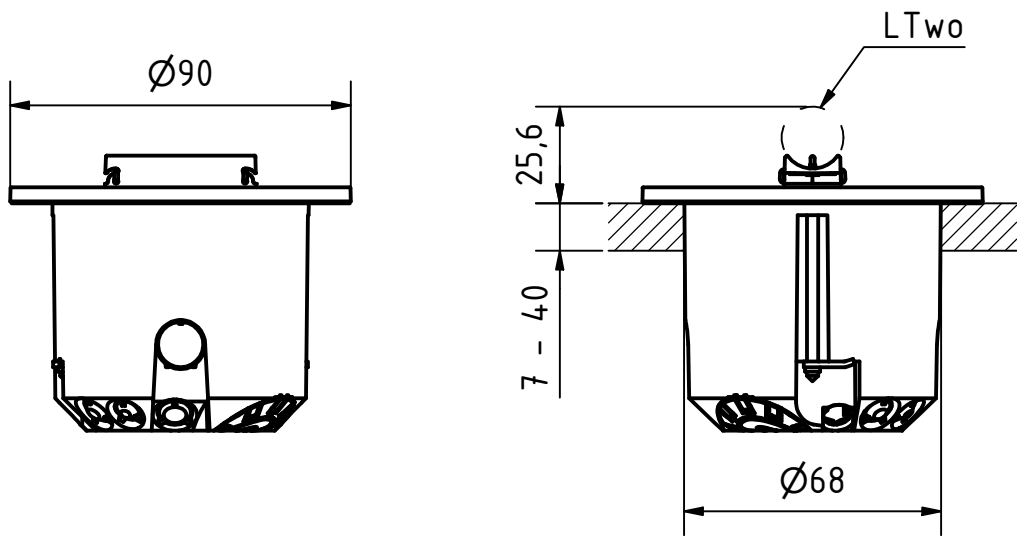

INDEX	TITLE	DATE	NAME		APL AG Lahnstr. 30 45478 Mülheim Germany		DATE	NAME		
						CREATOR	28.05.2025	Bleul		
						CONTROL				
						APPROVAL				
				Lumami® FLUSH BOX						
								M = 1 : 2	1/1	
								A4		

1234